

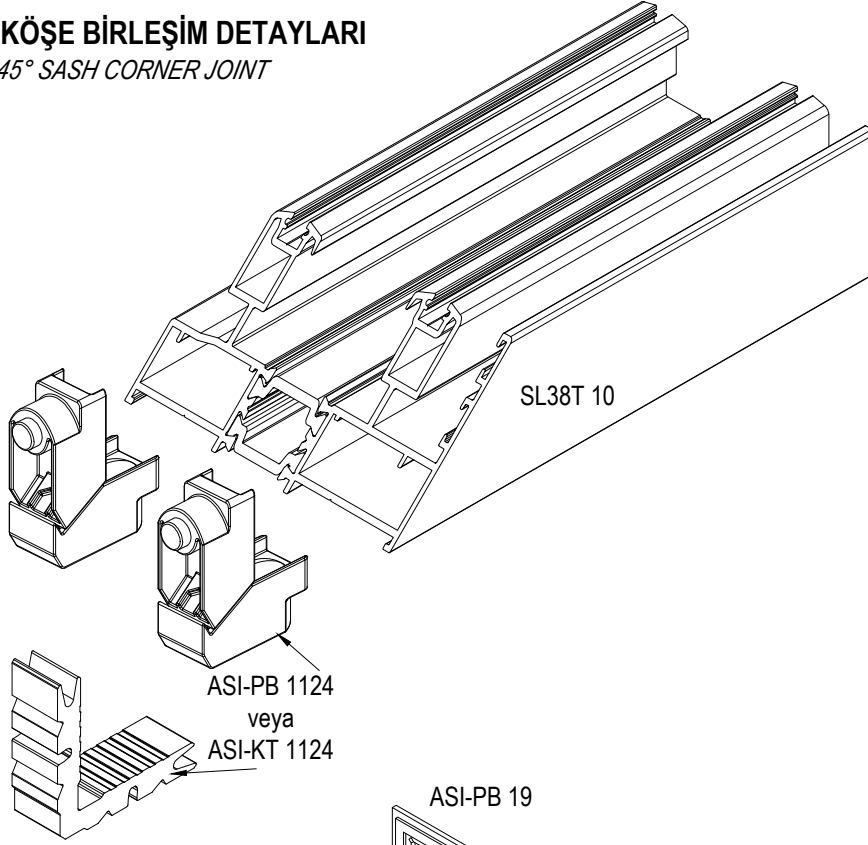



KESİM ve MONTAJ
CUTTING & ASSEMBLY


KANAT 45° KÖŞE BİRLEŞİM DETAYLARI DETAILS FOR 45° SASH CORNER JOINT

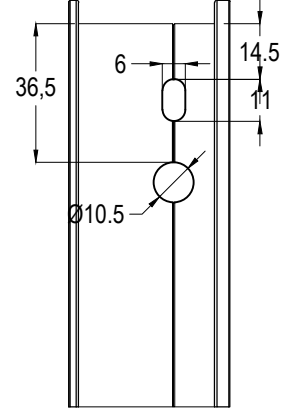


501 EKO PANÇ



KÖŞE BAĞLANTI İÇİN 7 veya 8mm ÇAPINDA
TAM ORTA NOKTADAN DELİK AÇILMALIDIR.
FOR CORNER CONNECTION, 7 or 8mm
DIAMETER HOLE SHOULD BE DRILLED
FROM THE MIDDLE POINT.

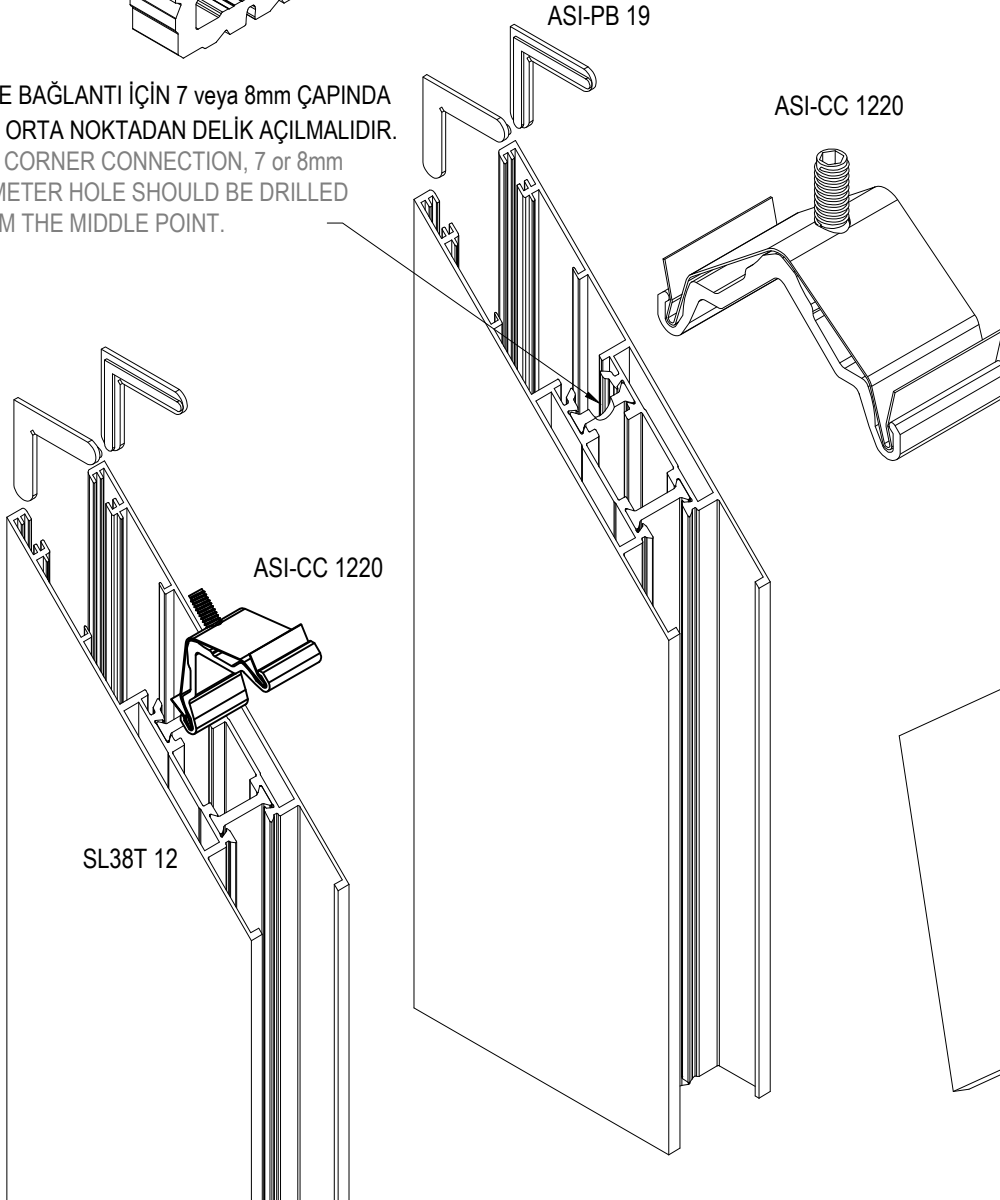

KÖŞE BAĞLANTI İÇİN
ALYAN ANAHTARI
KULLANILACAKTIR.
FOR THE CORNER
CONNECTION ALLEN
WRENCH SHOULD BE
USED.

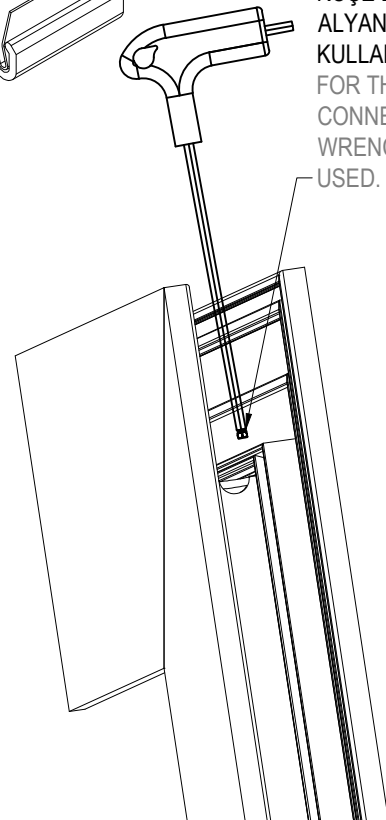





SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

ASISTAL

SL38T EKO PANÇ

SL38T ECO PUNCH MACHINE

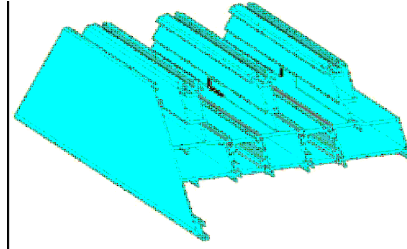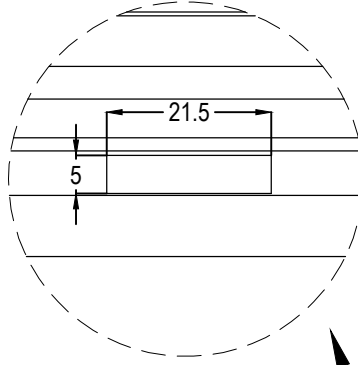





SU TAHLİYE DELİĞİ

Water Drainage

SL38T 09

SL38T 10

SL38T 101

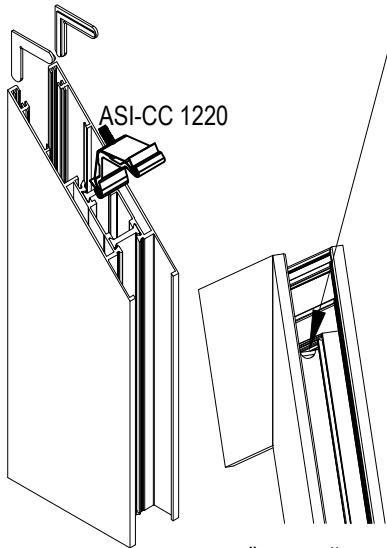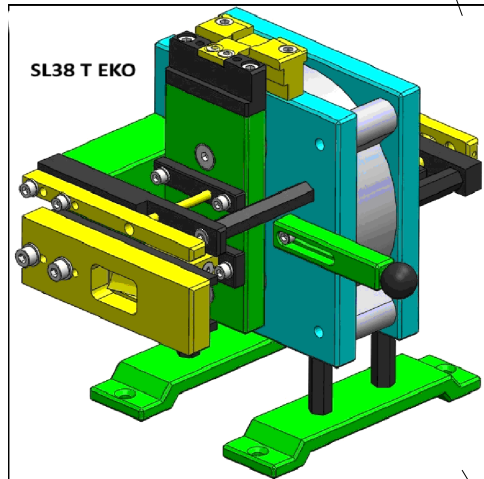

ASI-CC 1220

ASI-CC 1220 KÖŞE BAĞLANTI



İÇİN DELME İŞLEMİ

Drill For Corner Joint

SL38T 12

SL38T 16

SL38T 17

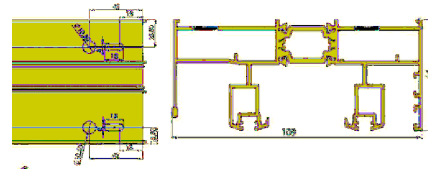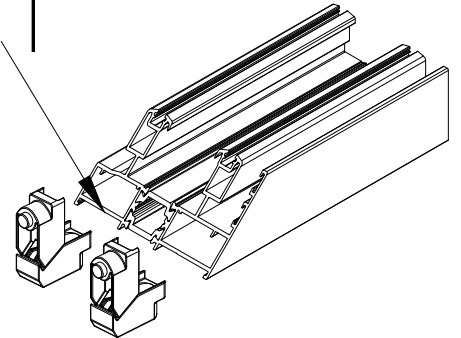

ASI-PB 1124 PİMLİ KÖŞE BAĞLANTI


İÇİN KASA DELME İŞLEMİ

Drill For Button Corner Joint

SL38T 09


SL38T 10

SL38T 101


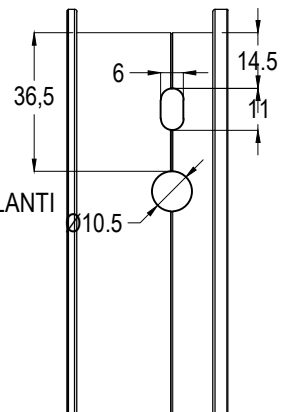


ASI-STP 06 KANAT STOPER VE KANAT DENGELİYİCİ

ASI-STP 06 SASH STOPER AND SASH STABILIZATION SPACER

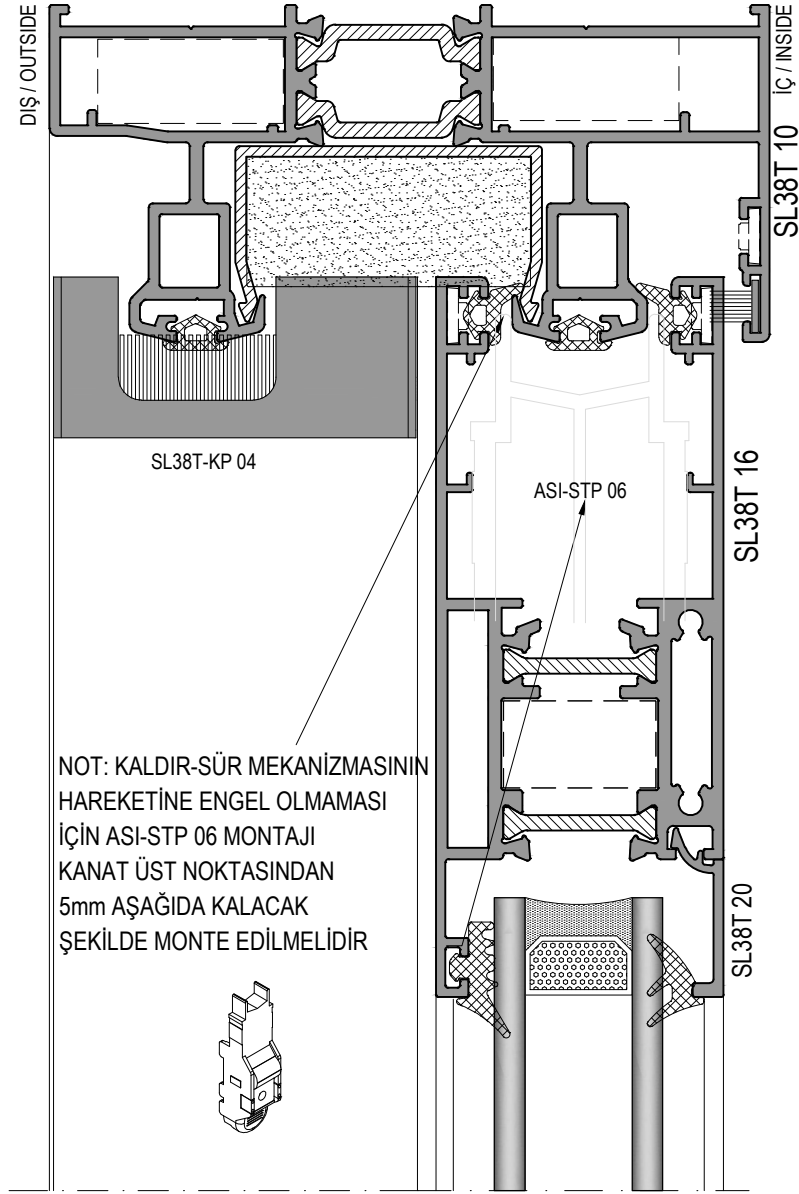


NOTE:
ASI-STP 06 INSTALLATION SHOULDN'T BE MOUNTED TO BE 5mm DOWN FROM THE TOP POINT OF THE SASH TO PREVENT THE MOVEMENT OF THE LIFT&SLIDE MECHANISM.

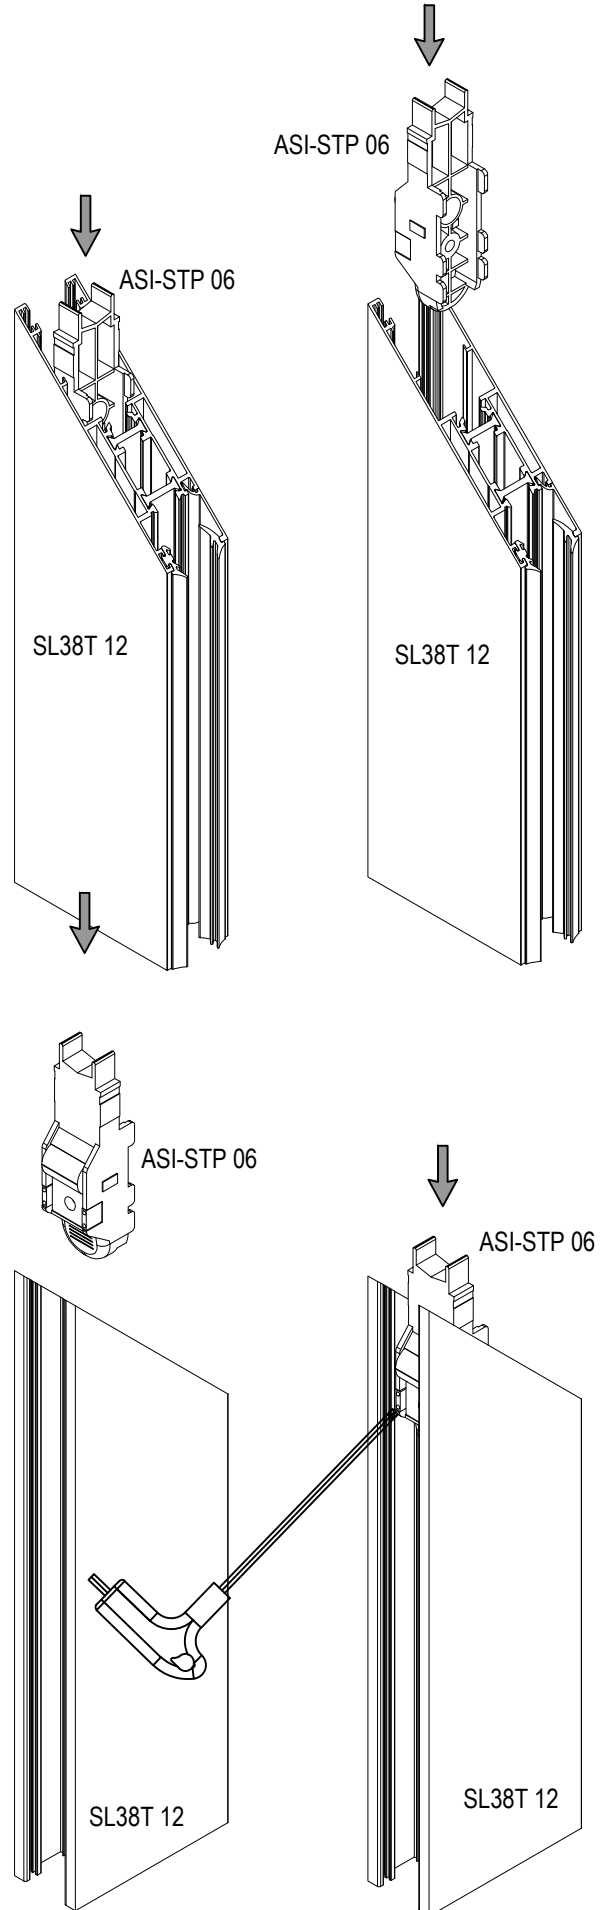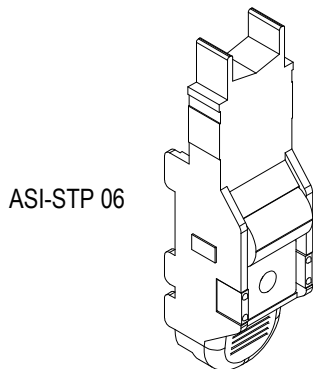

SL38T-STP01 KANAT Dengeleme TAKOZU

SL38T-STP01 SASH STABILIZATION SPACER

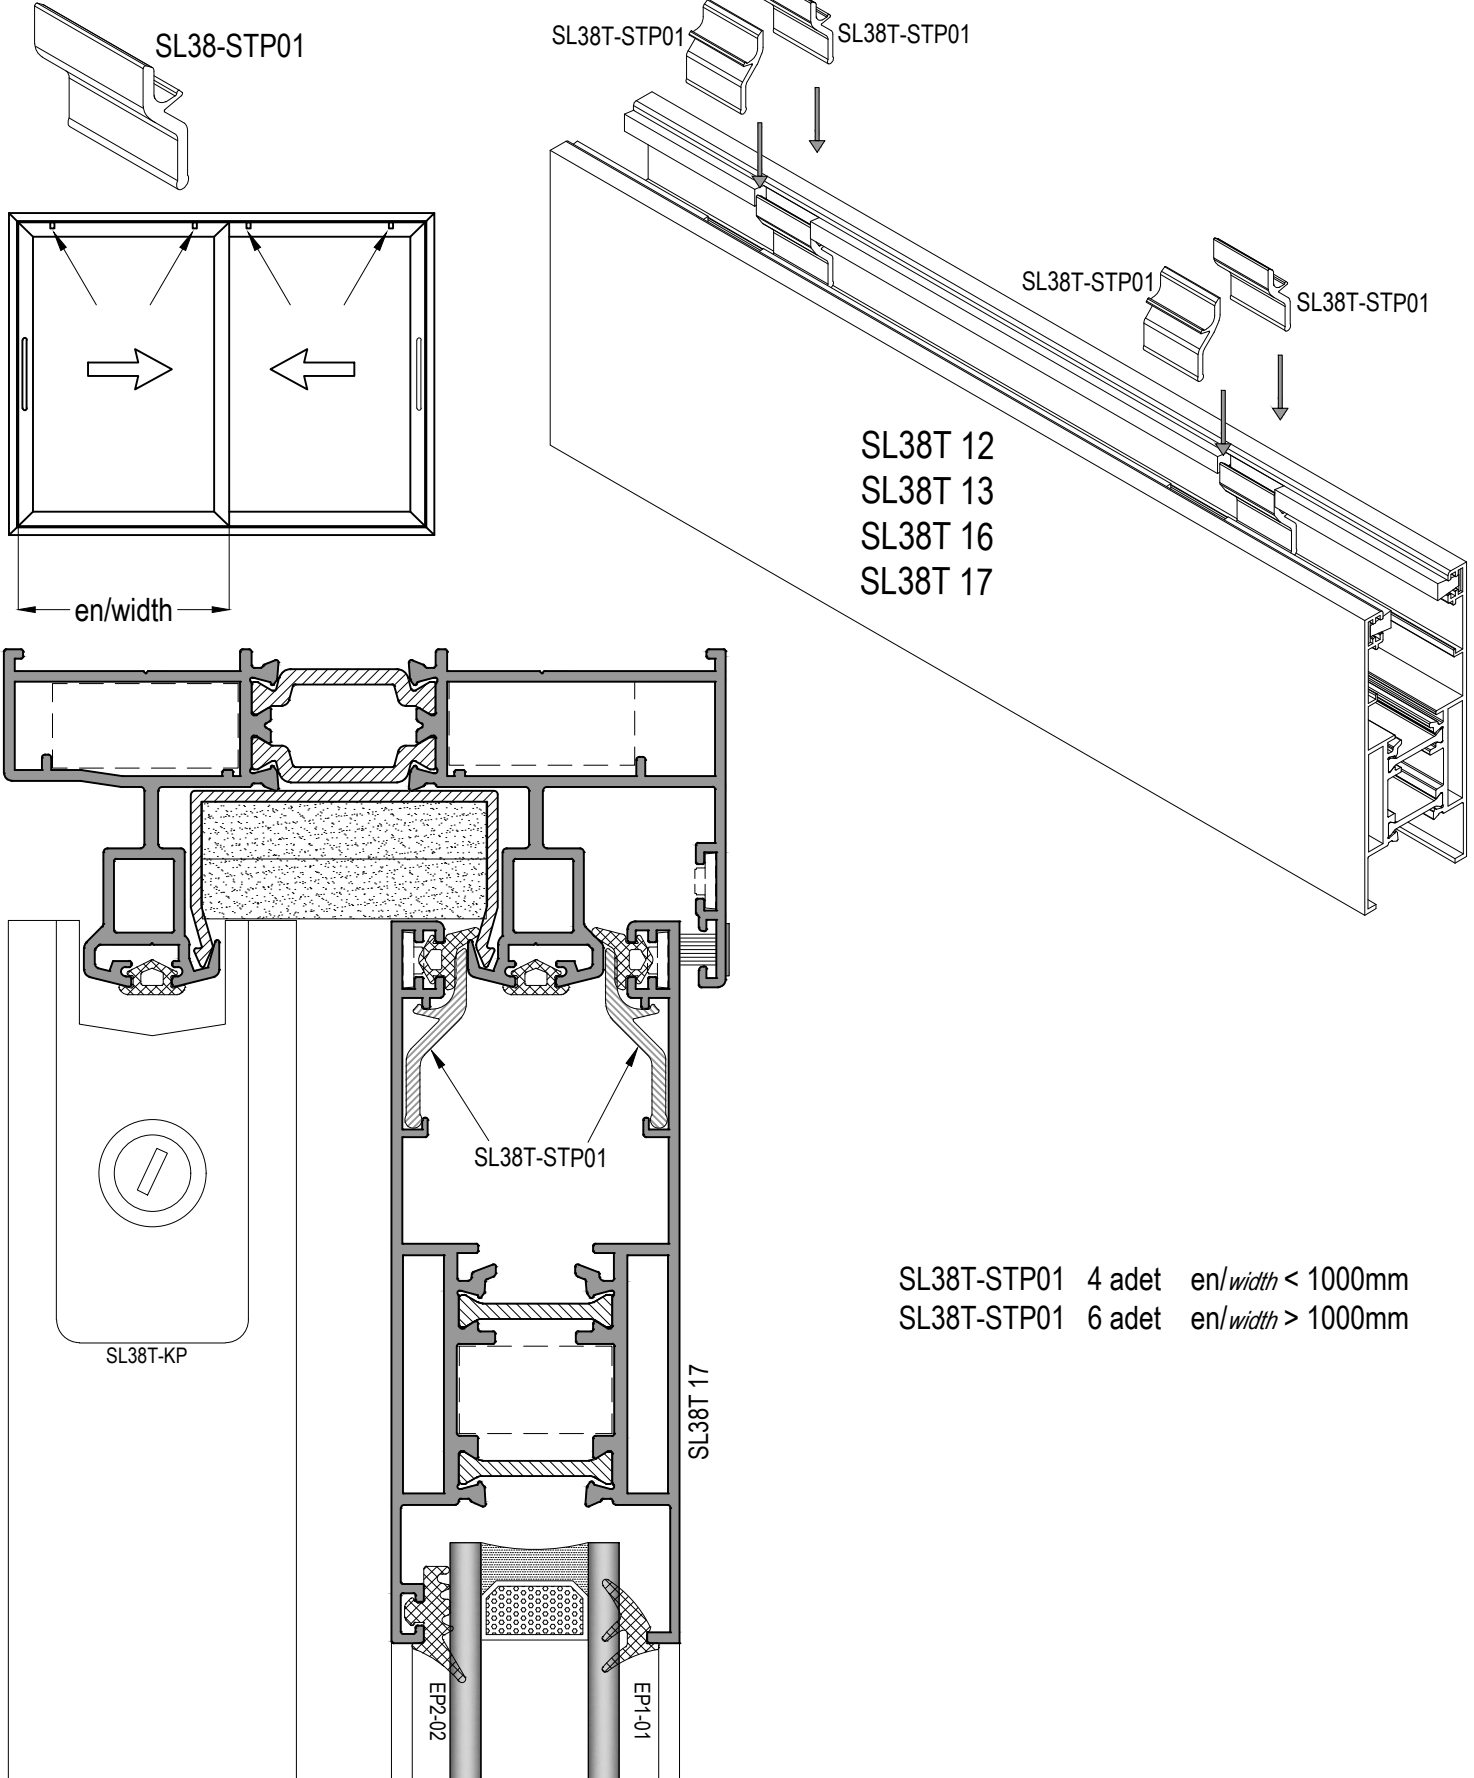


DÜZ KESİM İÇİN KENET KAPAĞI


FLAT CUTTING INTERLOCK PROFILE CAP

- KANAT AÇILIŞ YÖNÜNE GÖRE SAĞ VEYA SOL KAPAK OLARAK KULLANILACAKTIR.



COVERS WILL BE USED RIGHT OR LEFT, ACCORDING TO THE SASH SLIDING DIRECTION



SL38T-KP 04



SL38T 42



SL38T-KP 05

SL38T-KP 04


SL38T 42 kesim ölçüsü: Kanat yüksekliği - 37mm
SL38T 42 cutting size : Sash height - 37mm

SL38T 42

SL38T-KP 05


SL38T 12

SL38T-KP 04




H-37mm

SL38T 42

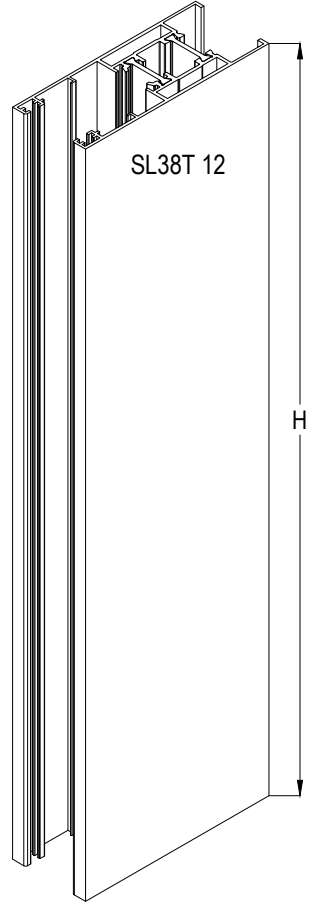

SL38T 12

H



KF 67-550





KF 67-550 FİTİLLERİ
KANAT BOYU KADAR UZUN
OLMALI
KF 67-550 must be
as long as sash profile height.

DÜZ KESİM İÇİN KENET KAPAĞI

FLAT CUTTING INTERLOCK PROFILE CAP

- KANAT AÇILIŞ YÖNÜNE GÖRE SAĞ VEYA SOL KAPAK OLARAK KULLANILACAKTIR.

COVERS WILL BE USED RIGHT OR LEFT, ACCORDING TO THE SASH SLIDING DIRECTION

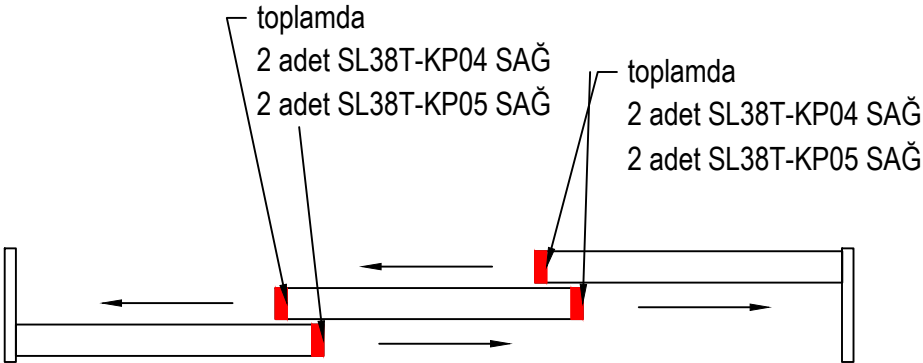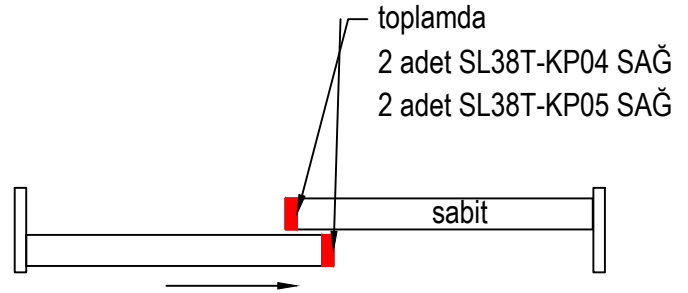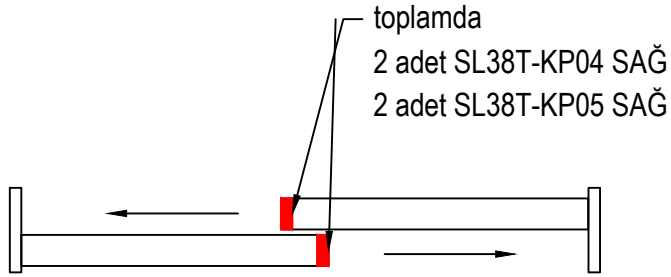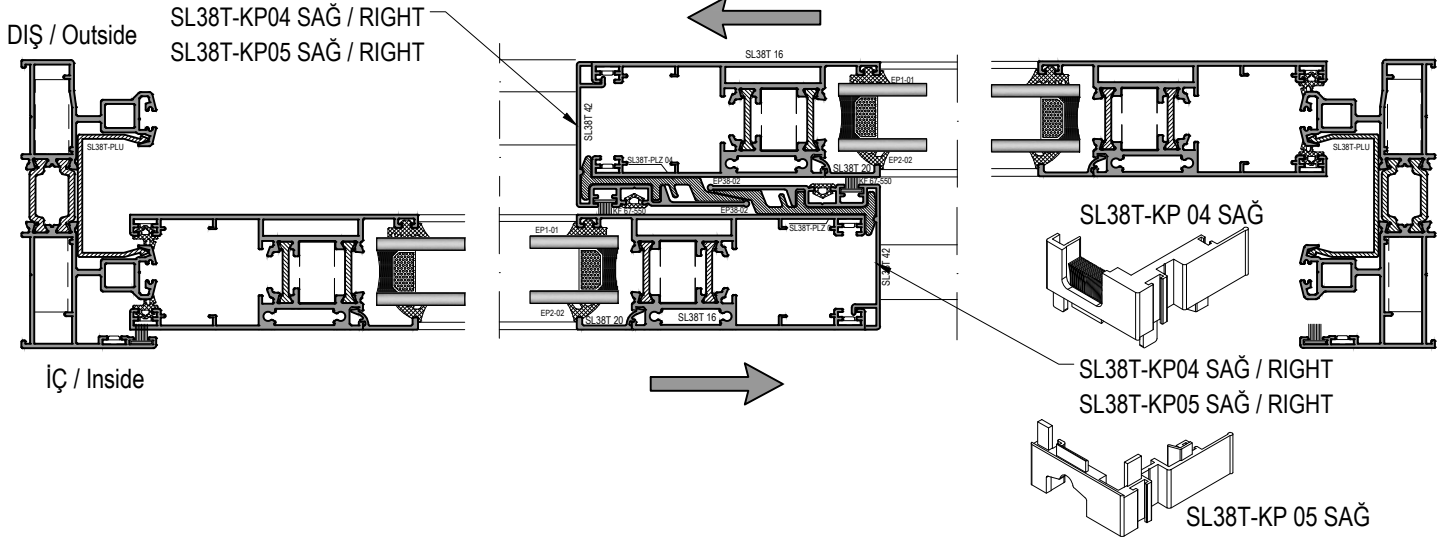


SL38T-K


YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM



SL38T-KP 03

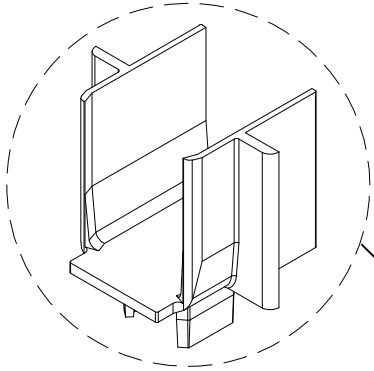

SL38T-KP 03




SL38T 12


H - 55mm

H

SL38T 43

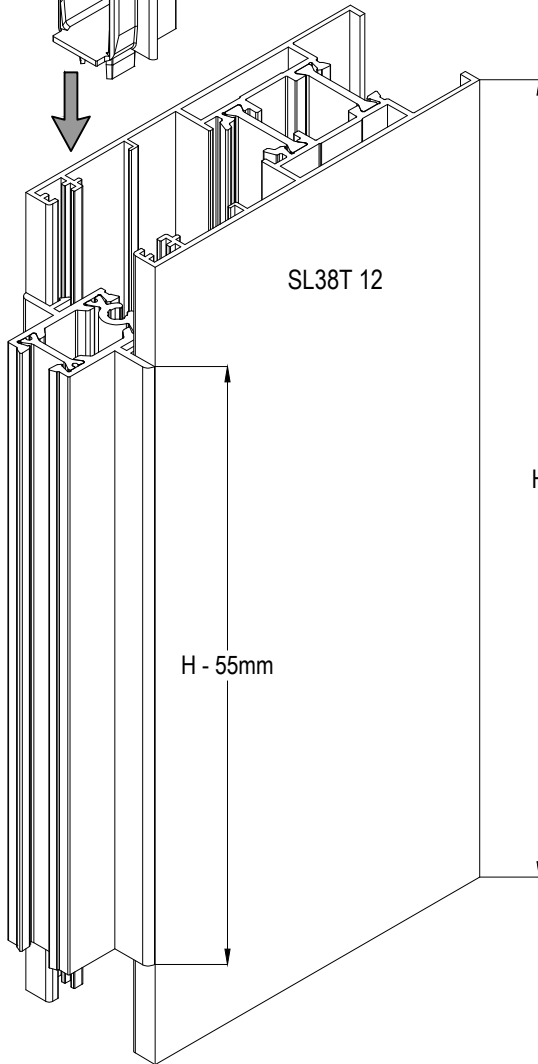

SL38T-KP 03



SABİTLİ KASADA ORTA KANAT SABİTLEME UYGULAMASI


CENTRAL LOCKING ASSEMBLY IN FIXED FRAME PROFILE

ALT VE ÜST BİTİŞE



TOPLAM 4 ADET

ASI-PB 100 MONTAJ İÇİN

4 pieces ASI-PB 100 needed
for installation to lower and
upper finishes




ASI-PB 100.1

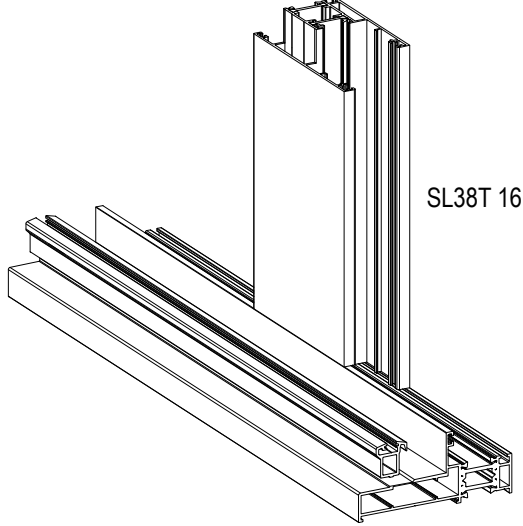


SL38T 16

SL38T 09

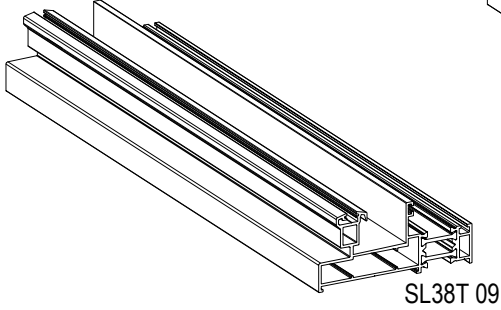


SL38T 09

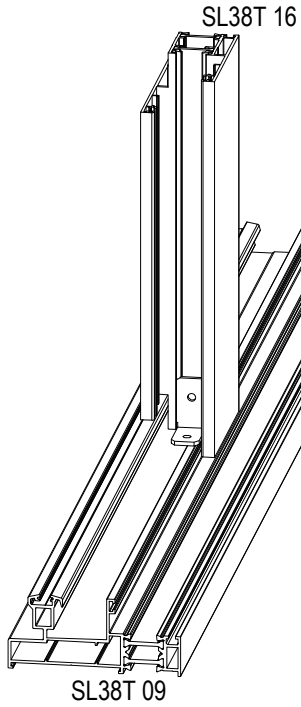

SL38T 16


SL38T 09

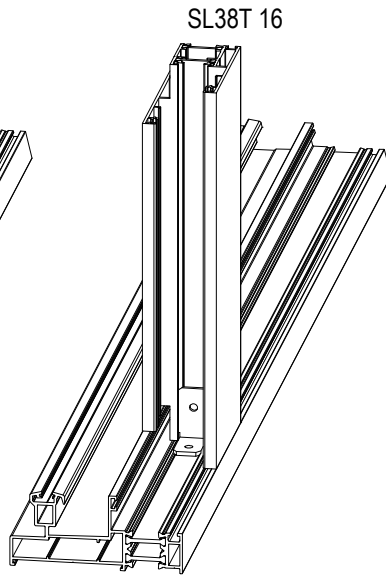

SL38T 16

SL38T 09

KERTME HİZASI
Notching alignment

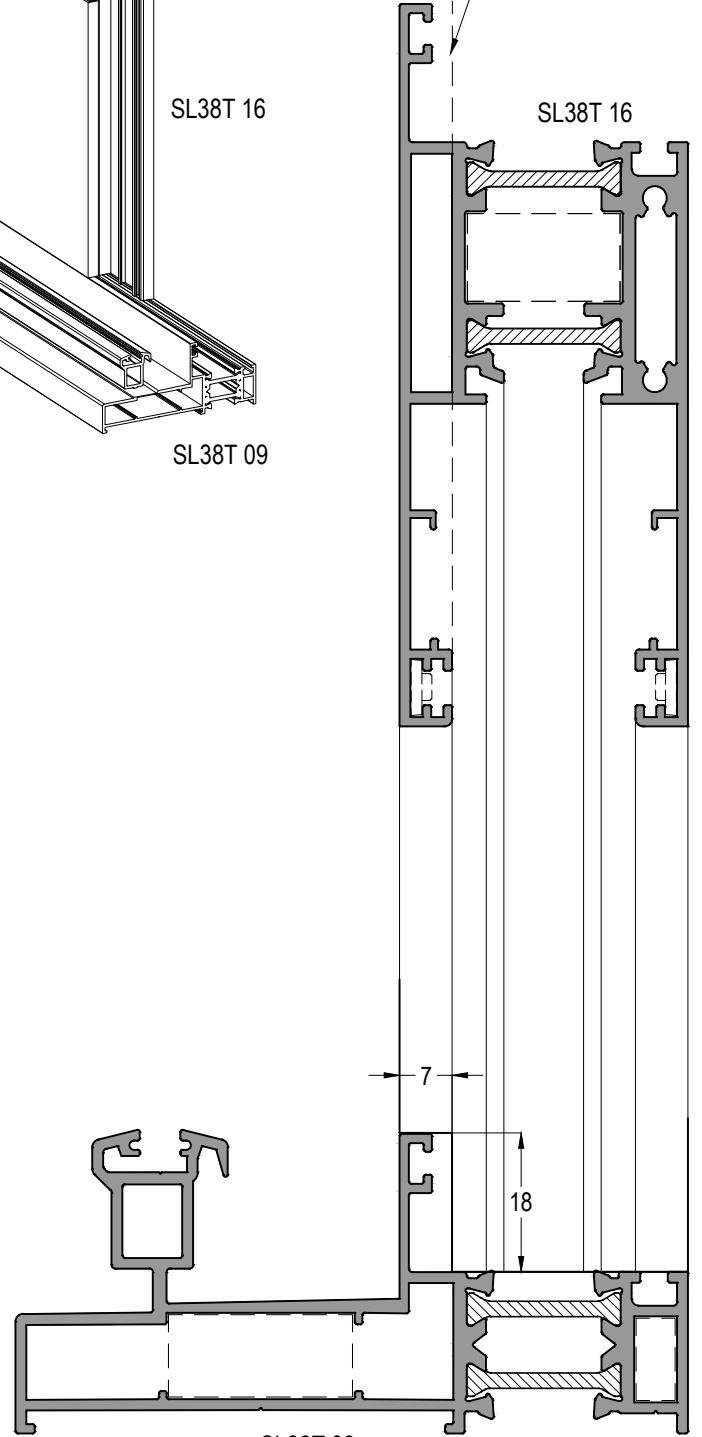


SL38T 09

VİDA / Screw


KANAT SABİTLEME

SASH FIXING

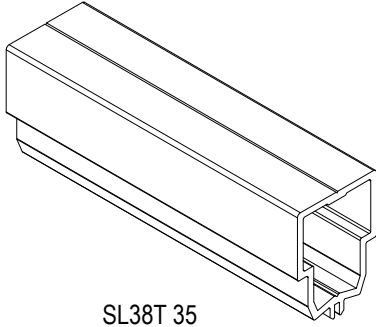


SL38T 35


(PARÇA KODU SL38T-DB100)

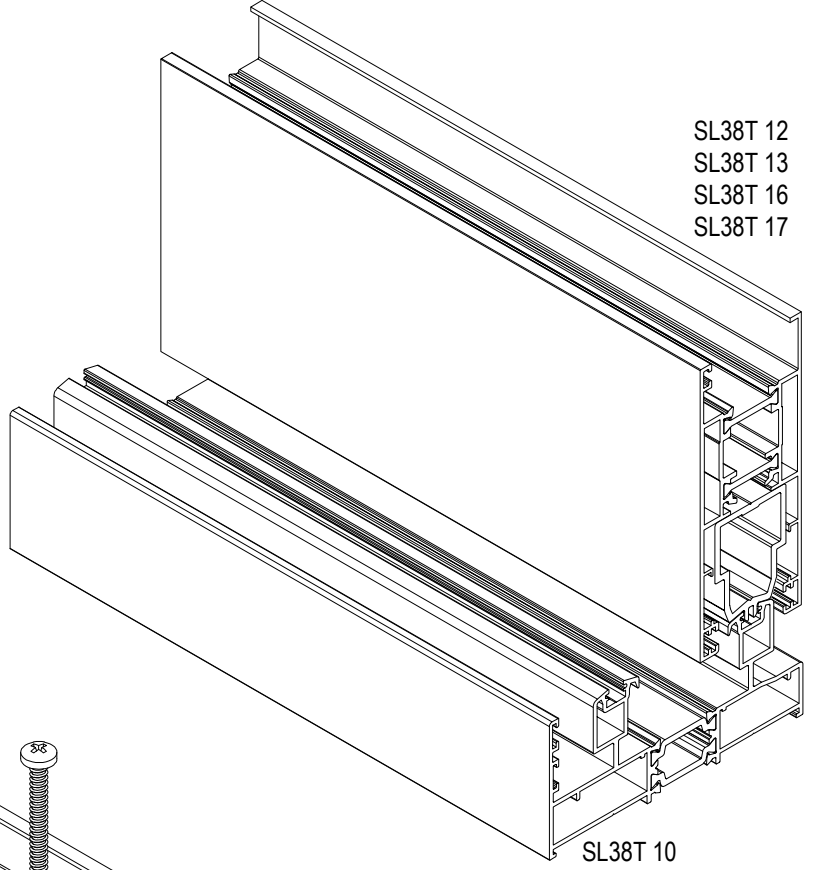

SL38T 12
SL38T 13
SL38T 16
SL38T 17

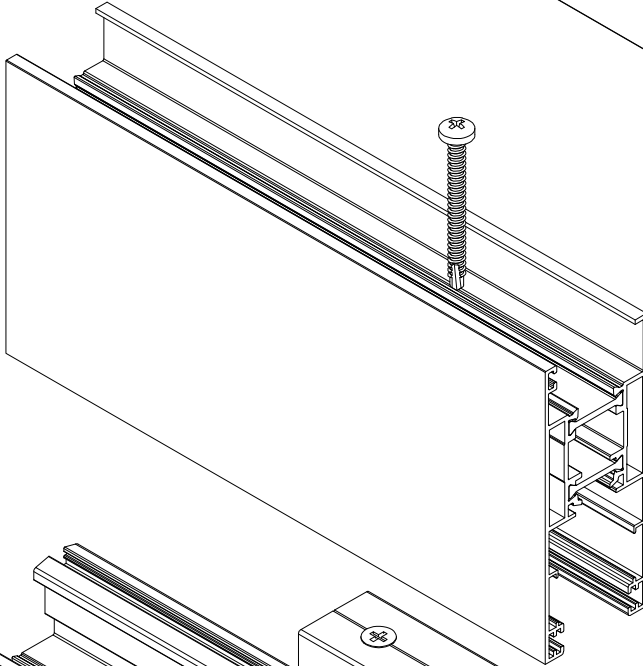

SL38T 12
SL38T 13
SL38T 16
SL38T 17

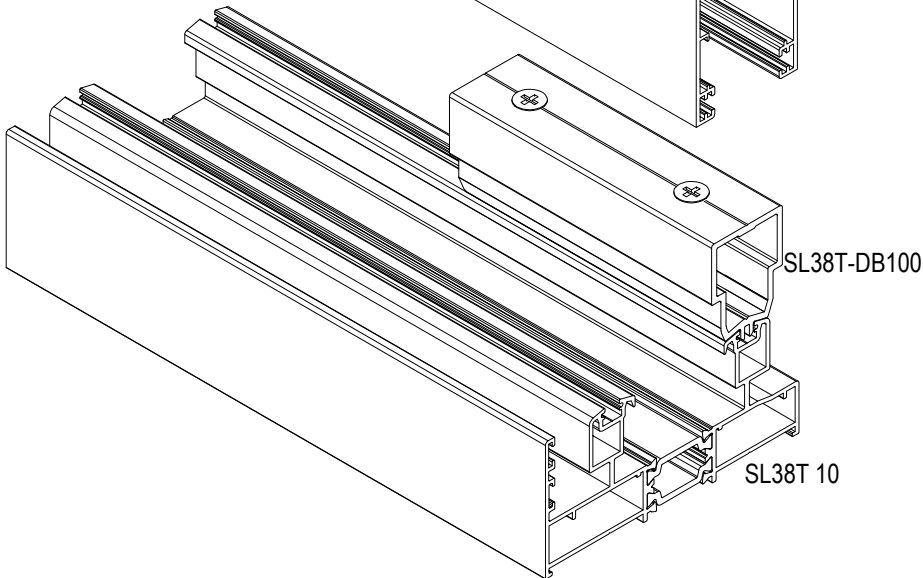


SL38T-DB100

SL38T 10


SL38T SİSTEMDEN TH55 SİSTEME GEÇİŞ KASASI

FRAME PROFILE BETWEEN SL38T AND TH55 SYSTEM

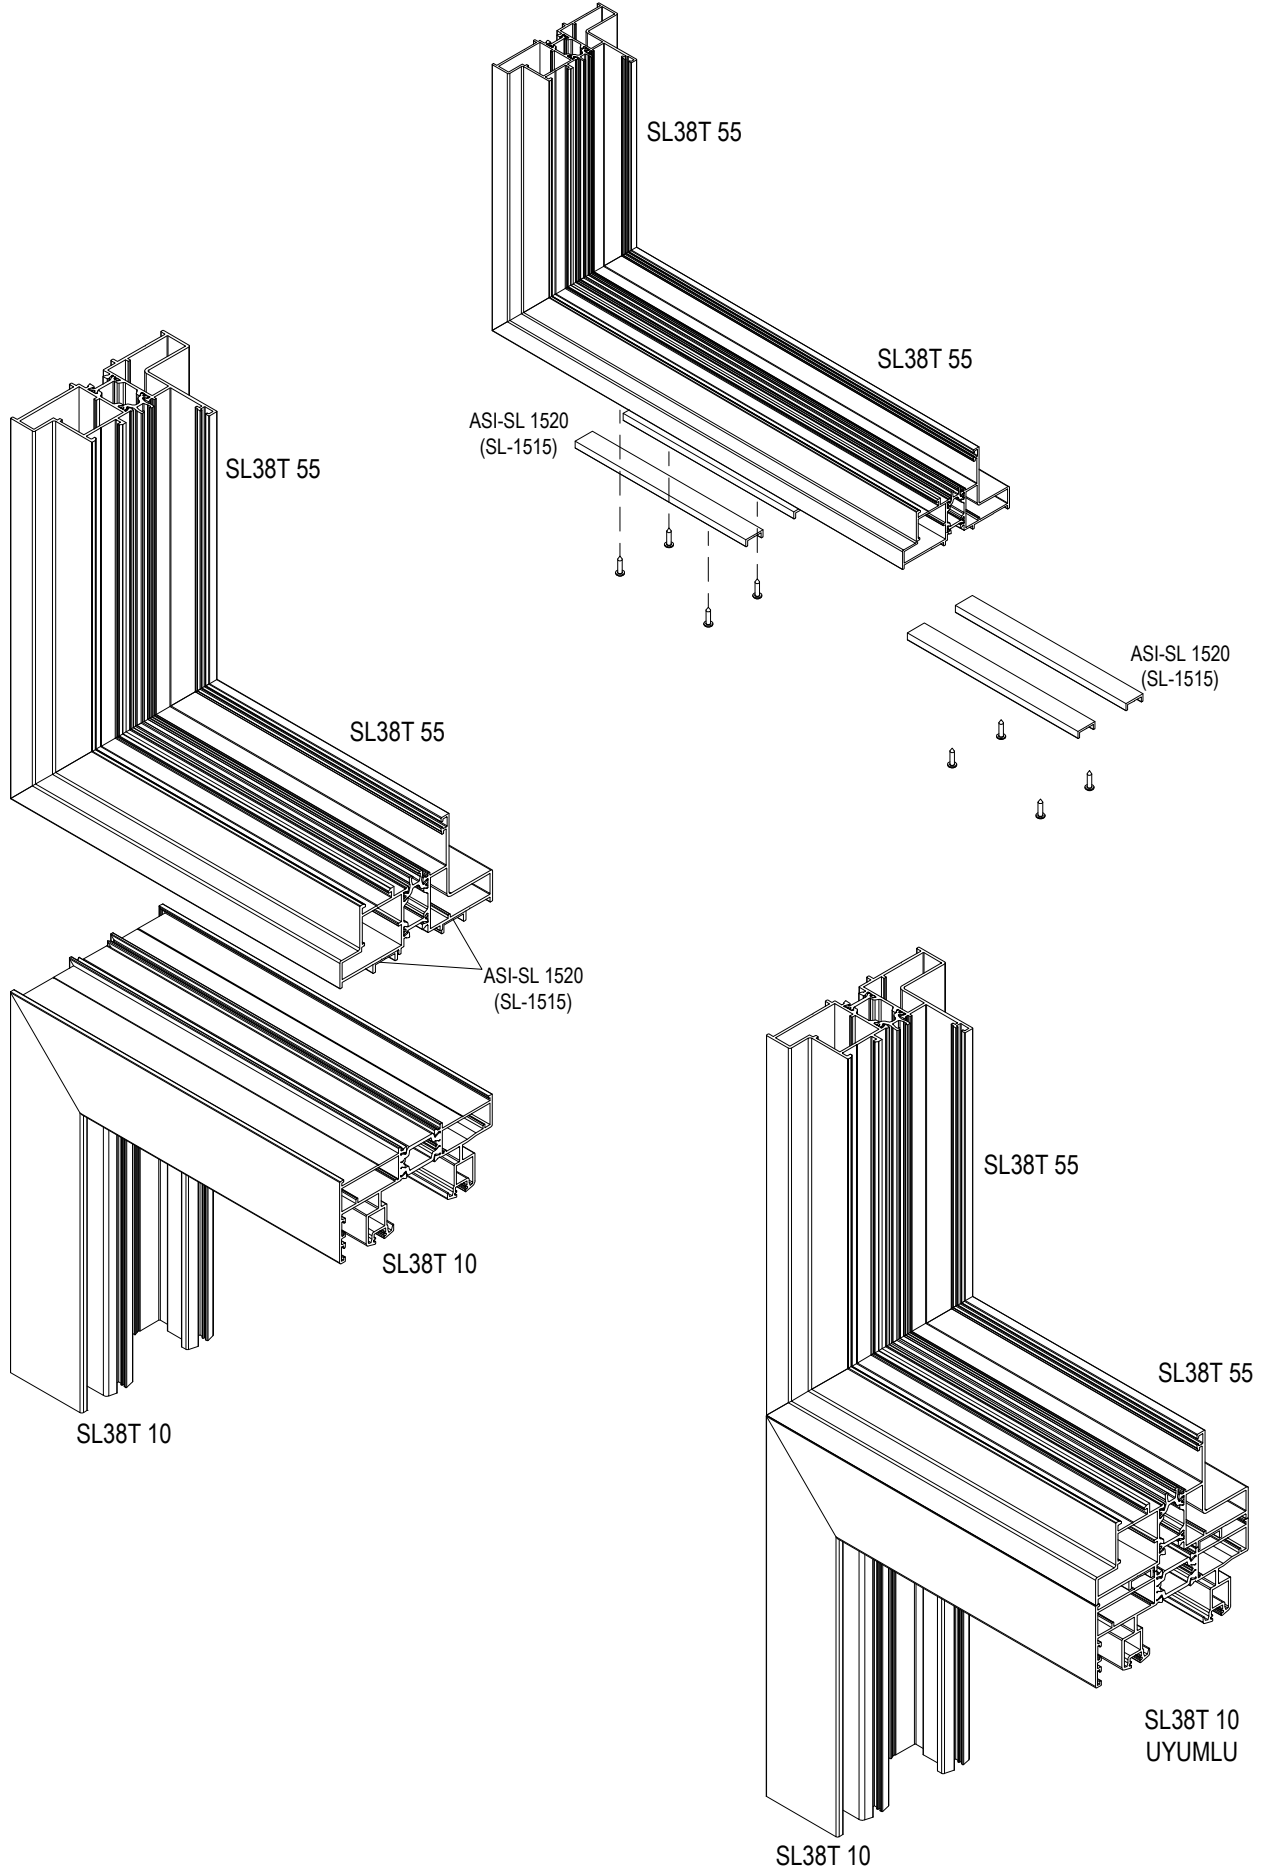


SL38T KALDIR-SÜR SİSTEMDE ALT TEKER MERKEZLEME PARÇASI MONTAJI

ASSEMBLY FOR LIFT-SLIDE SYSTEM ROLLER SUPPORT ACCESSORIES

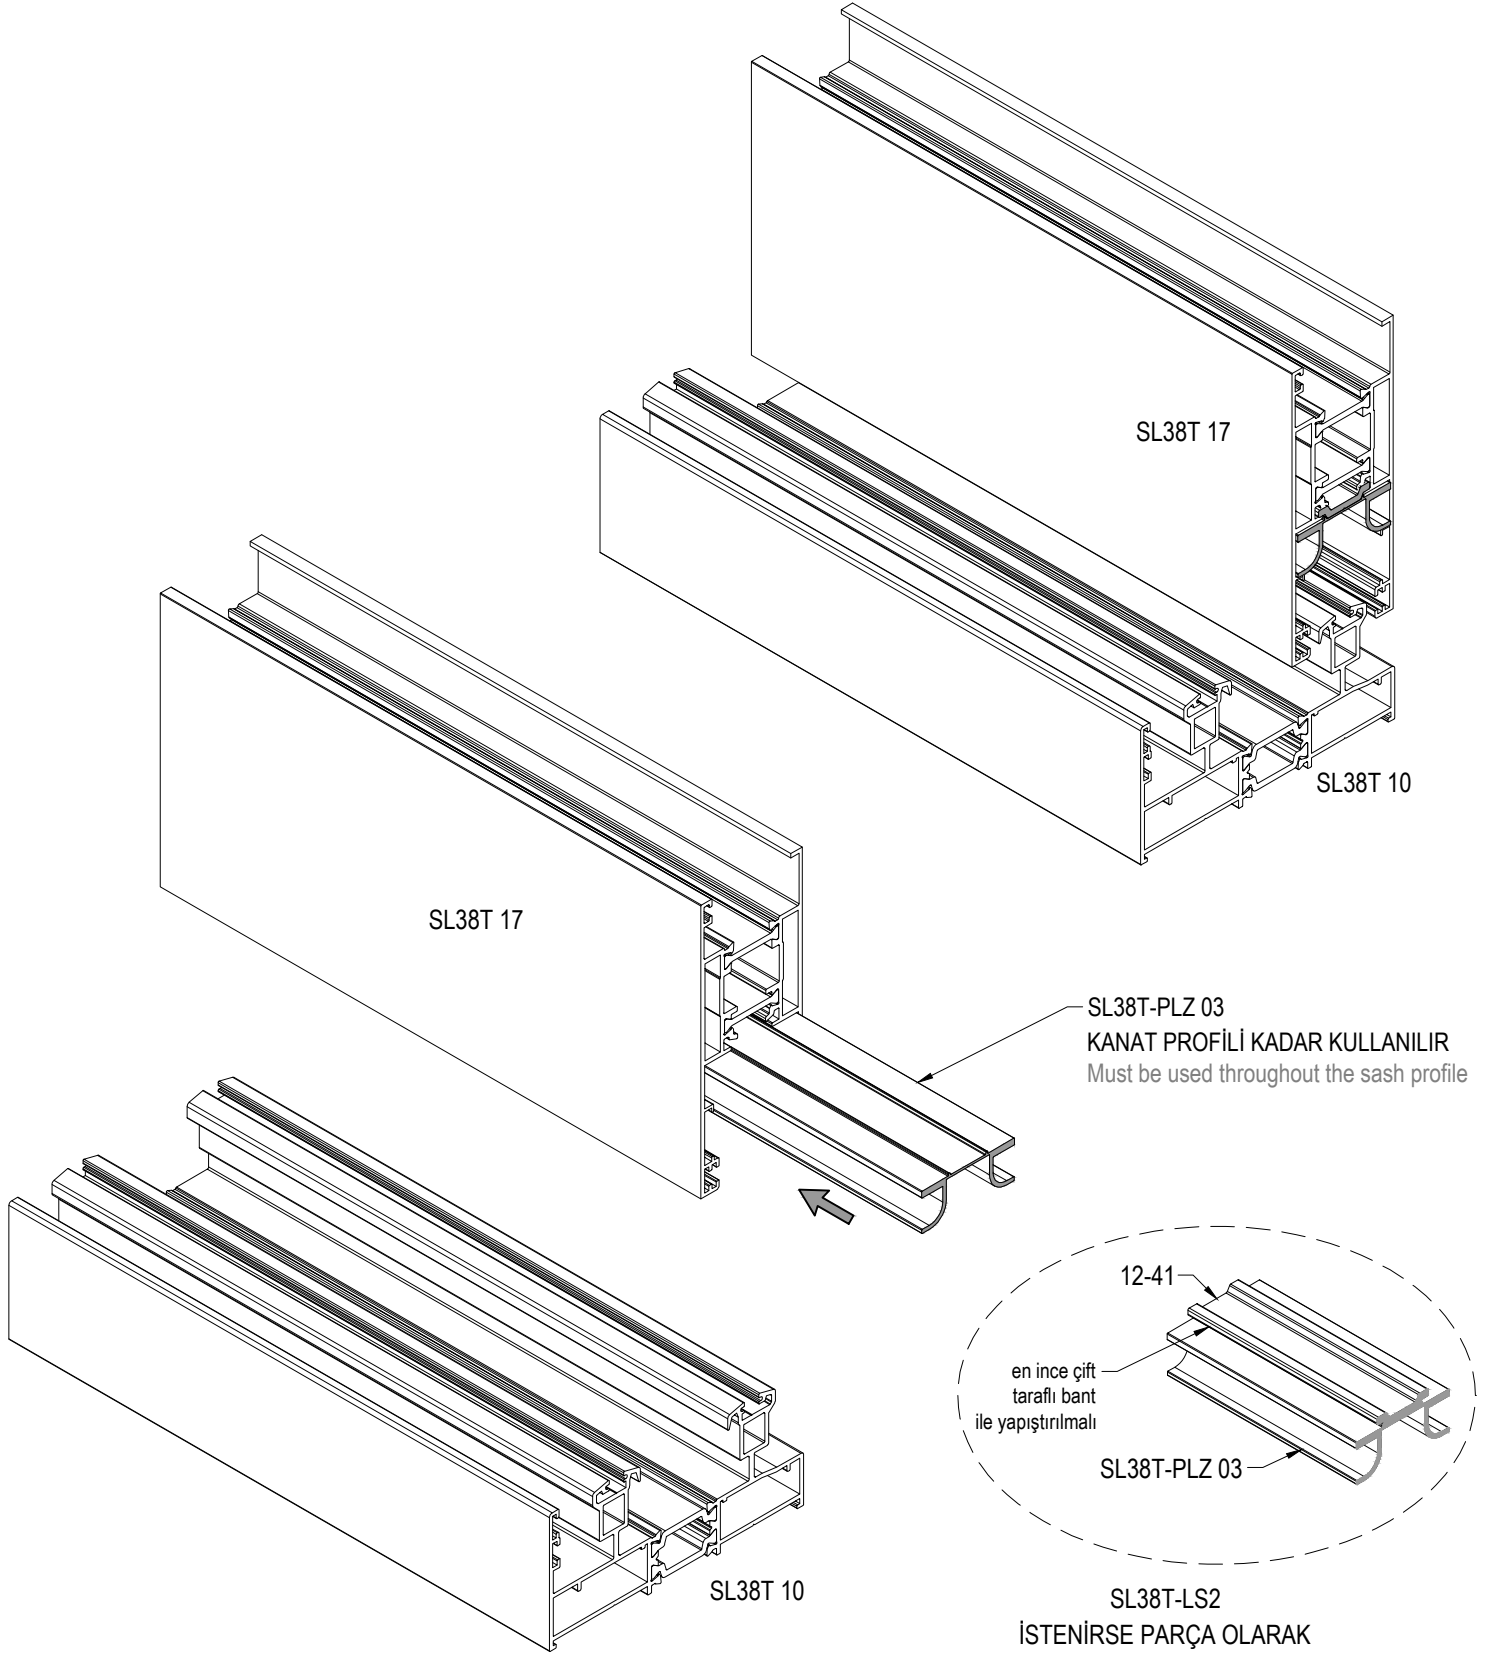


KALDIR-SÜR MEKANİZMASI MONTAJ ŞEMASI - SL38T MEK1

LIFT & SLIDING MECHANISM INSTALLATION FOR SL38T- MEK1

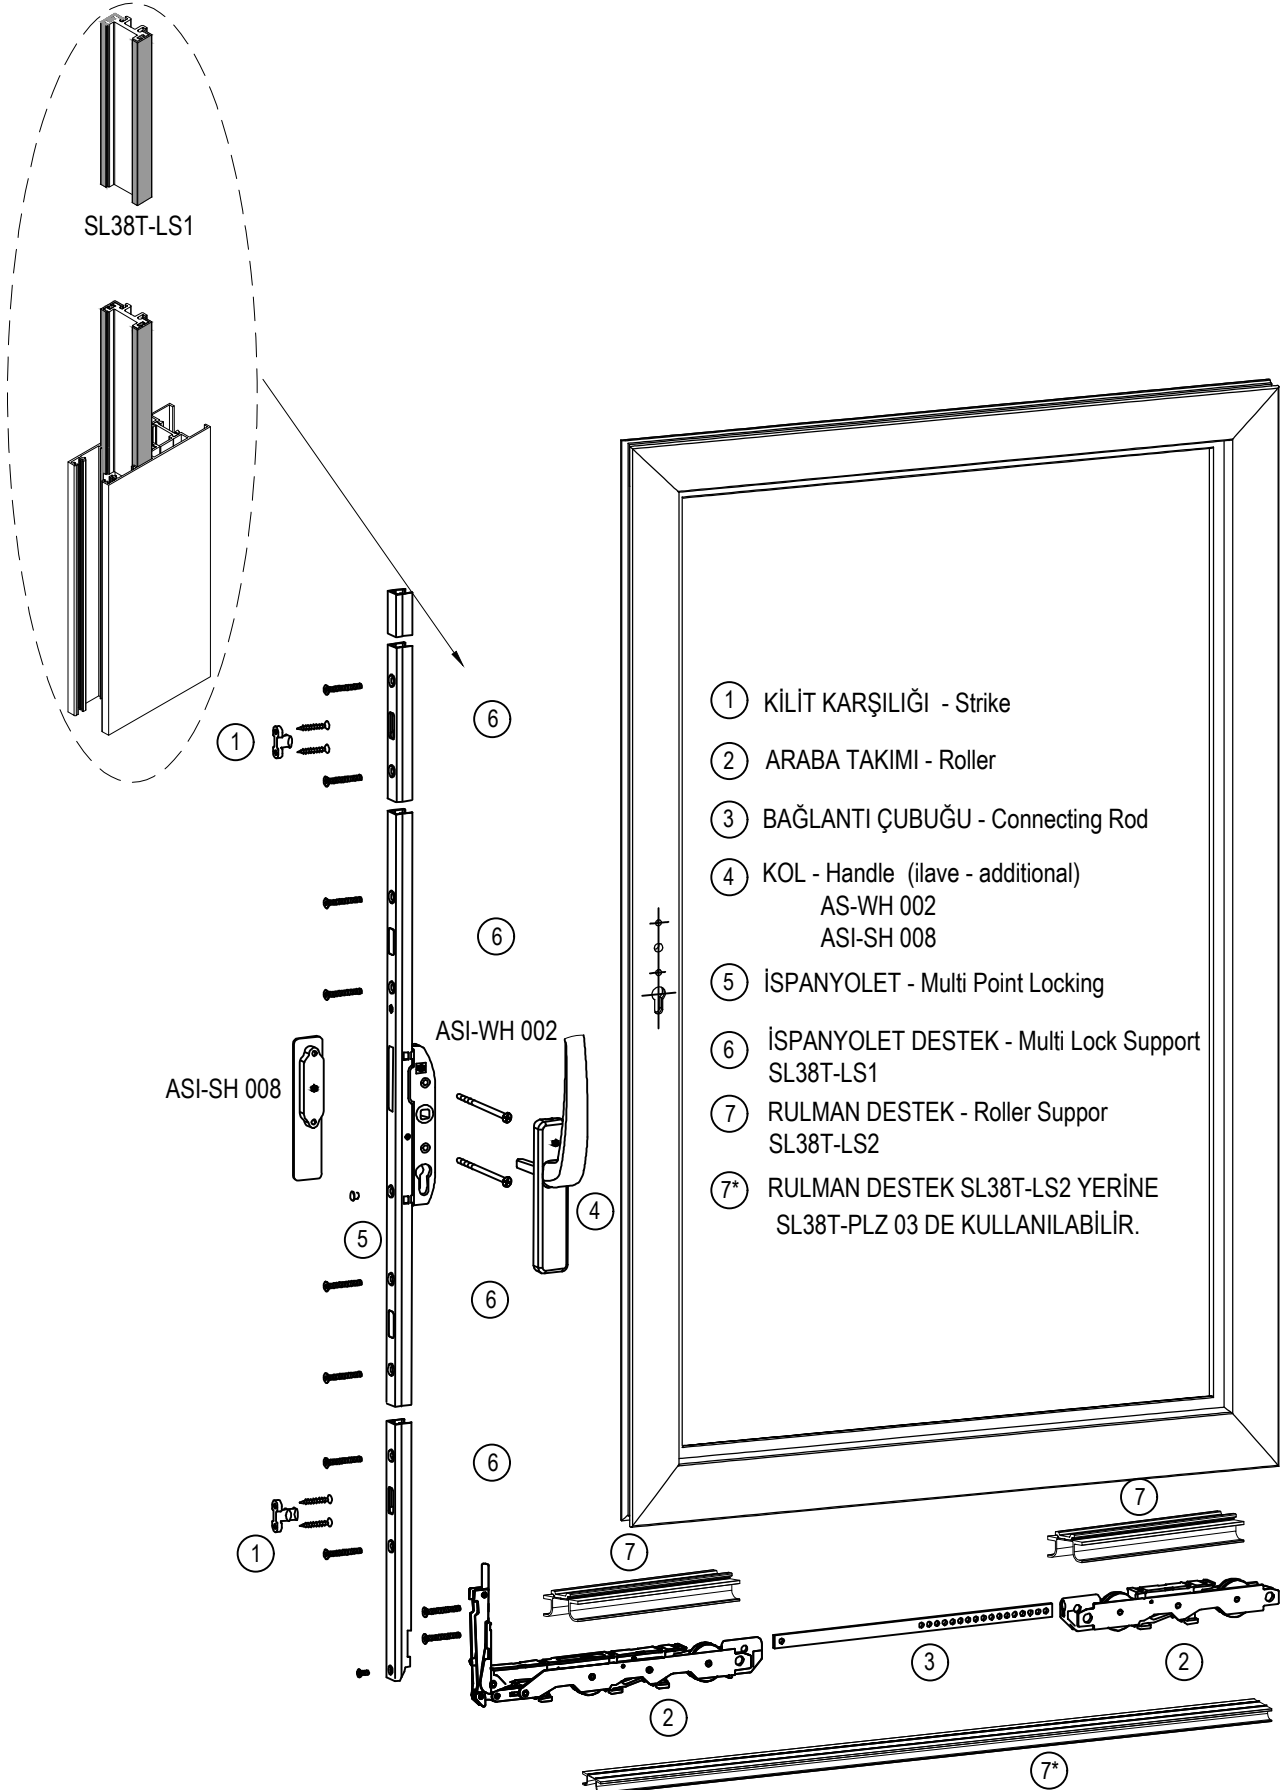

FLY-KP01 SİNEKLİK KANAT VE KAPAK MONTAJI


FLY-KP01 FLIYSCREEN SASH AND COVER ASSEMBLY

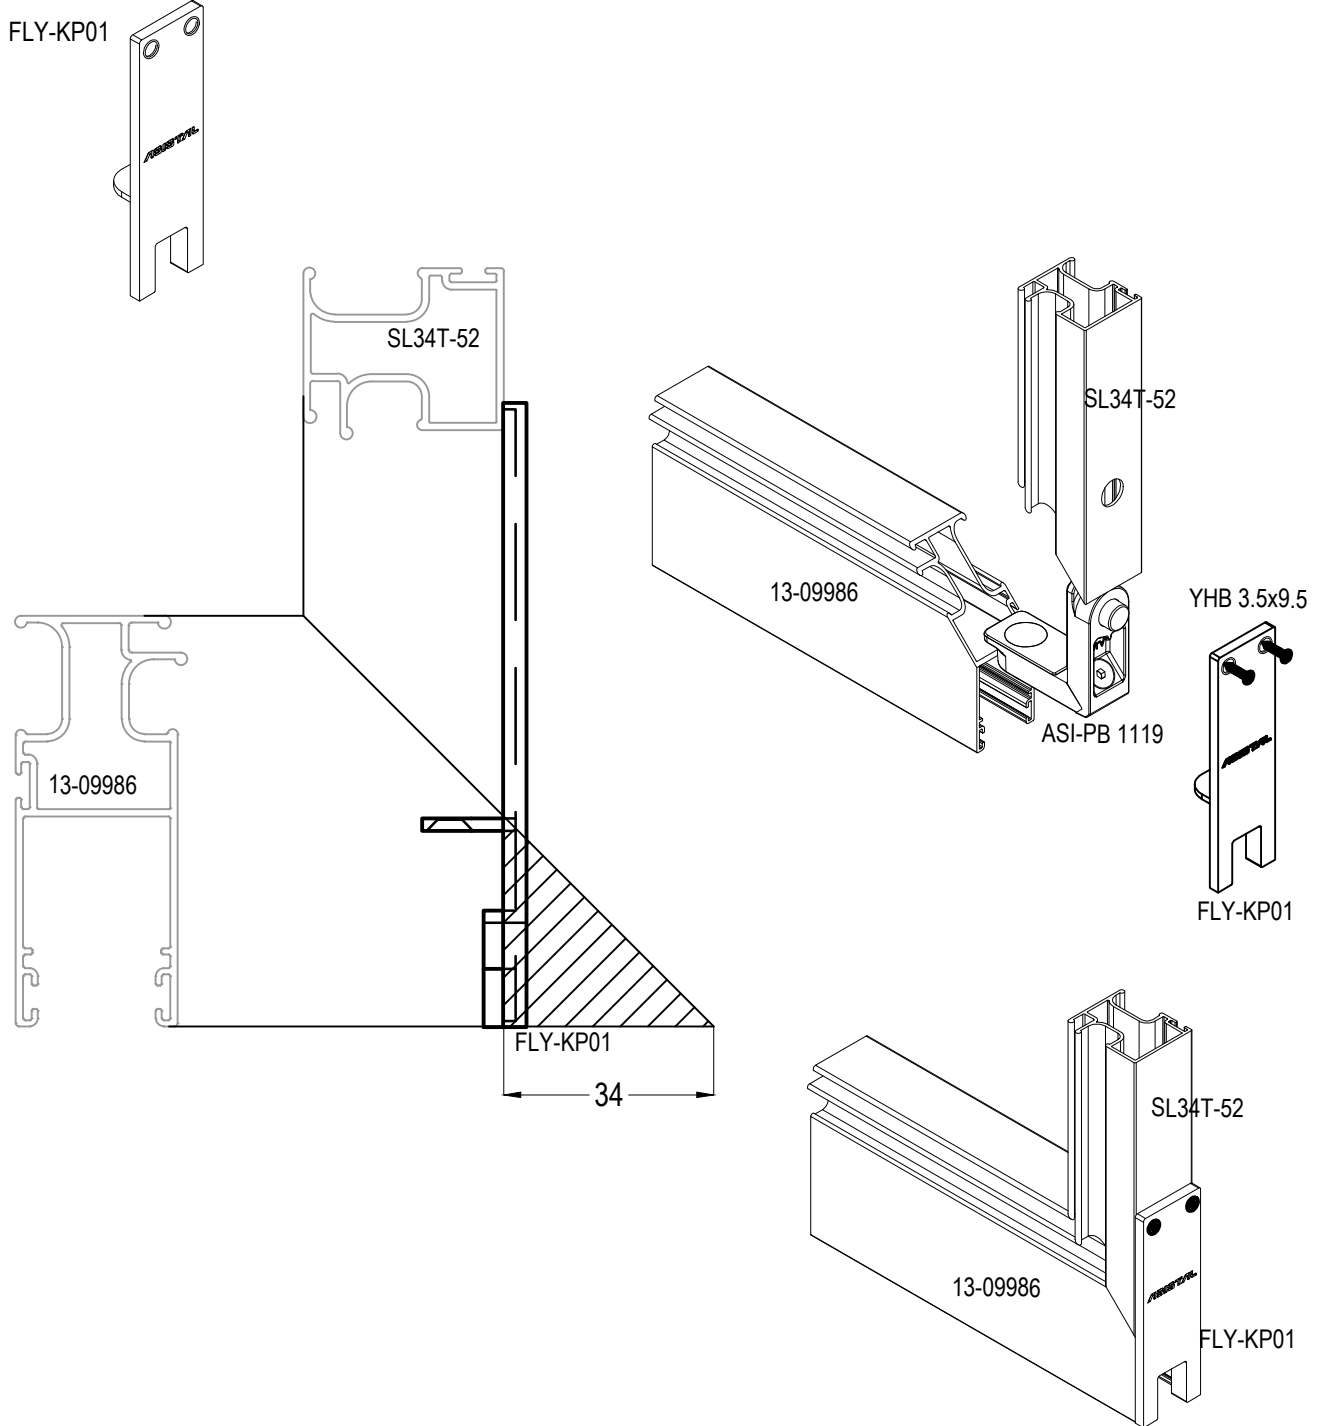

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

DRENAJ SİSTEMİ
DRAINAGE SYSTEM

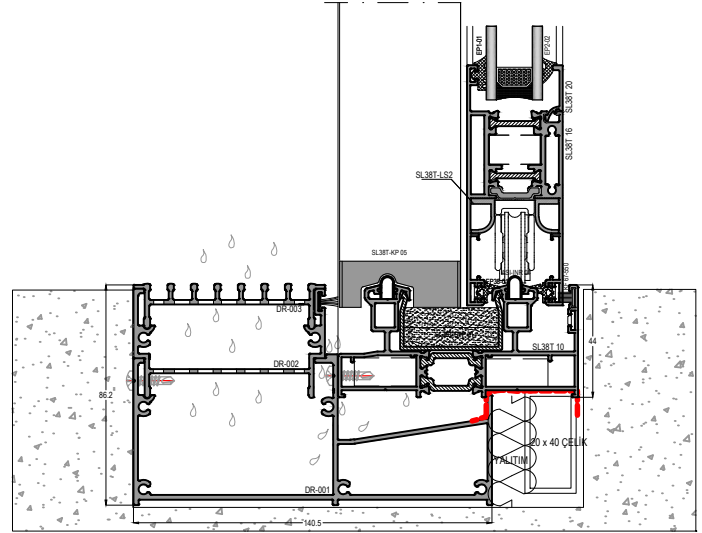

The drawing illustrates the cross-section of a window frame, divided into two main parts: 'İÇ / INSIDE' (top) and 'DİŞ / OUTSIDE' (bottom). The frame is shown in a perspective view, with a central opening for the glass unit. The frame is composed of several parts, labeled with circled numbers 1, 2, and 3. Dimensions are provided in millimeters (mm).





Top View (İÇ / INSIDE):

- The overall width of the frame is labeled as **MAX 500mm**.
- The distance from the inner edge of the frame to the center of the glass unit is **80** mm.
- The distance from the center of the glass unit to the outer edge of the frame is **120** mm.
- The frame is divided into sections by vertical lines, with dimensions of **21.5** mm and **20** mm.
- Red arrows indicate the direction of water flow, showing it being directed away from the glass unit.






Bottom View (DİŞ / OUTSIDE):

- The overall width of the frame is labeled as **MAX 500mm**.
- The distance from the inner edge of the frame to the center of the glass unit is **80** mm.
- The distance from the center of the glass unit to the outer edge of the frame is **120** mm.
- The frame is divided into sections by vertical lines, with dimensions of **21.5** mm and **20** mm.
- Red arrows indicate the direction of water flow, showing it being directed away from the glass unit.

The drawing also includes a central section labeled **L/2**, indicating the midpoint of the frame's length.

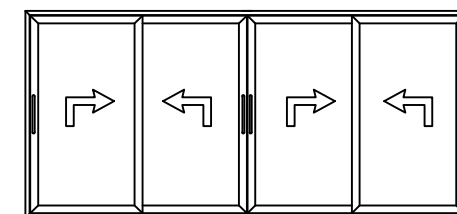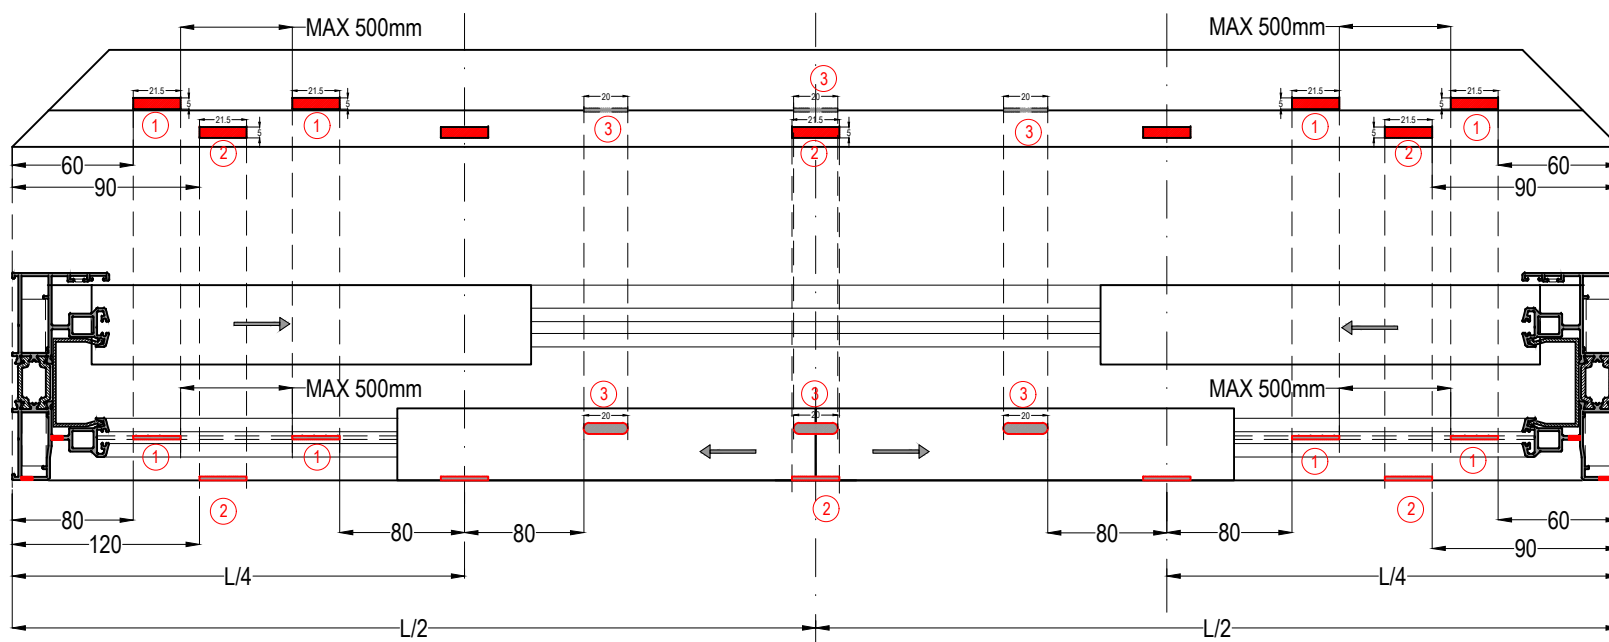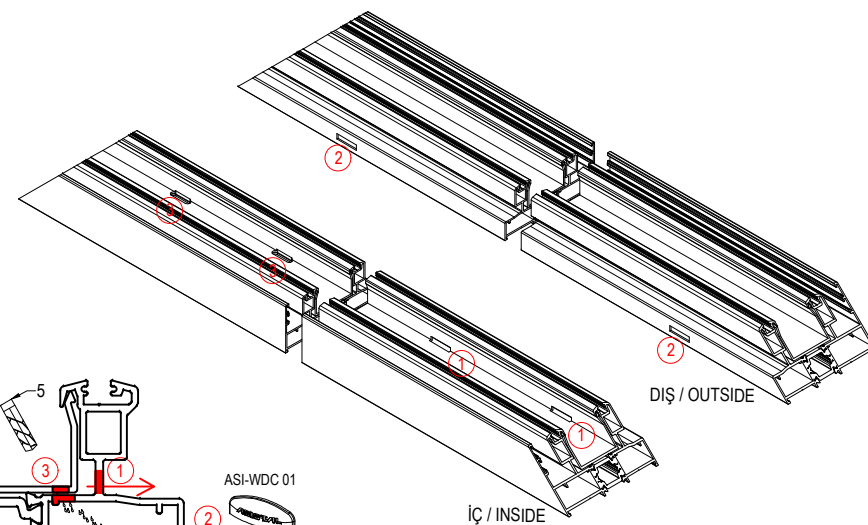
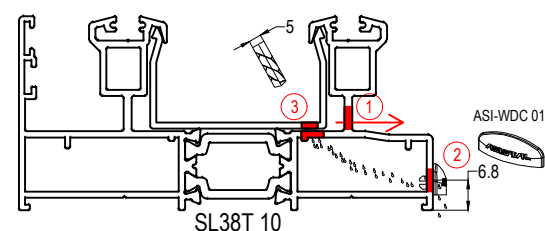


MONORAIL KASA PROFİLİNDE SU TAHLİYE DELİKLERİNİN AÇILMASI
WATER DRAINAGE HOLES ON THE MONORAIL FRAME PROFILES

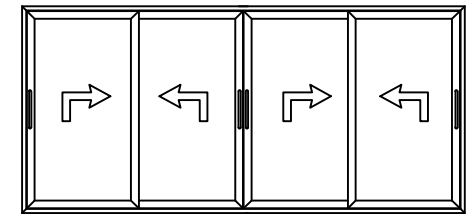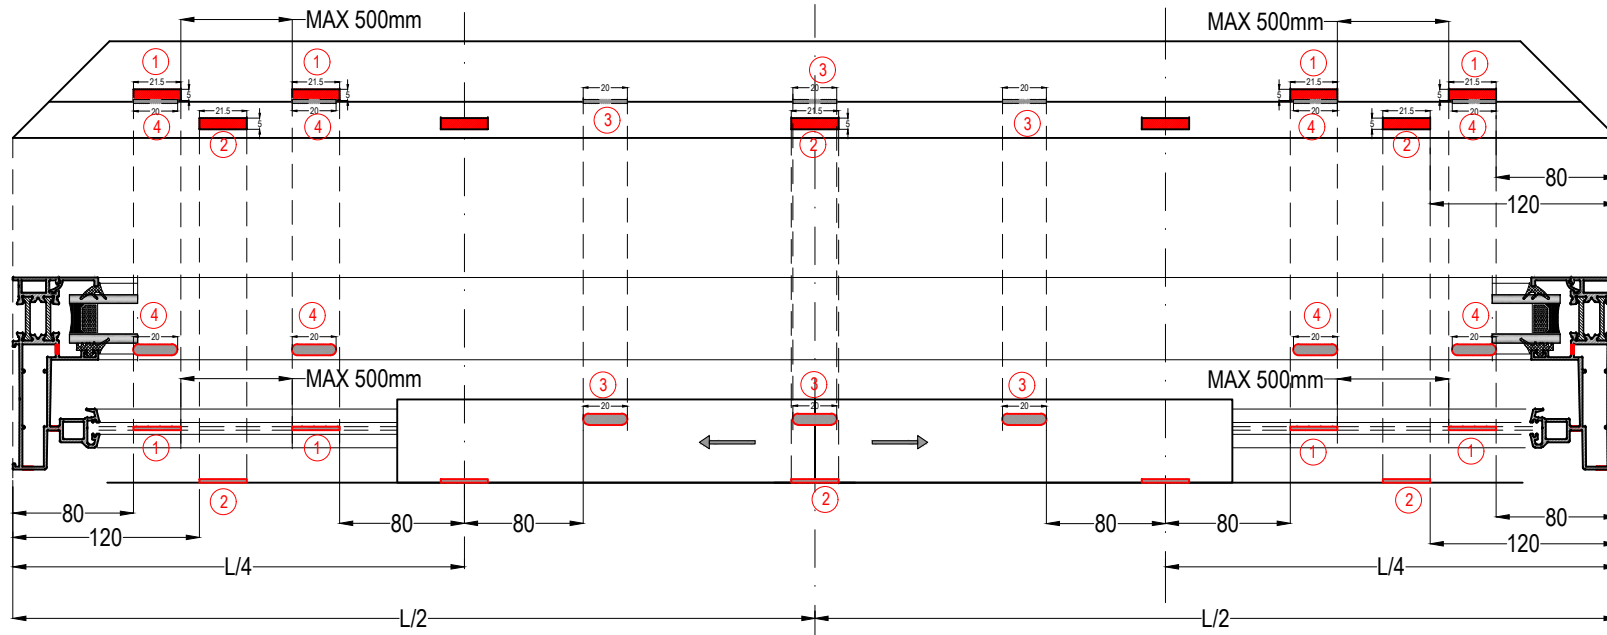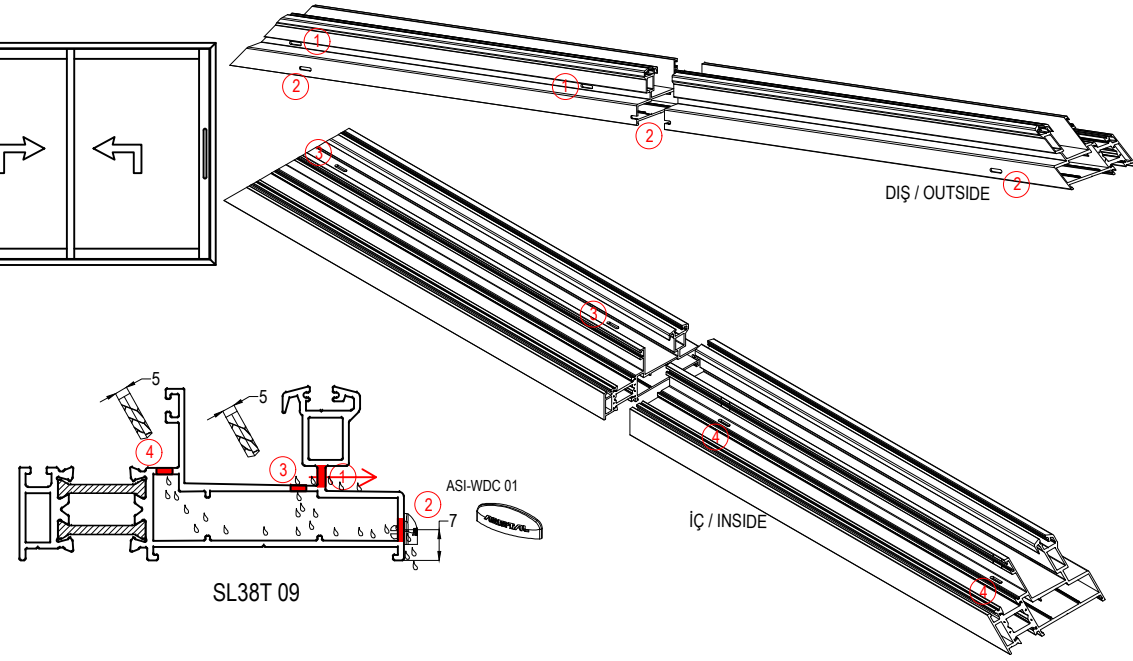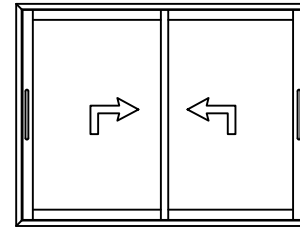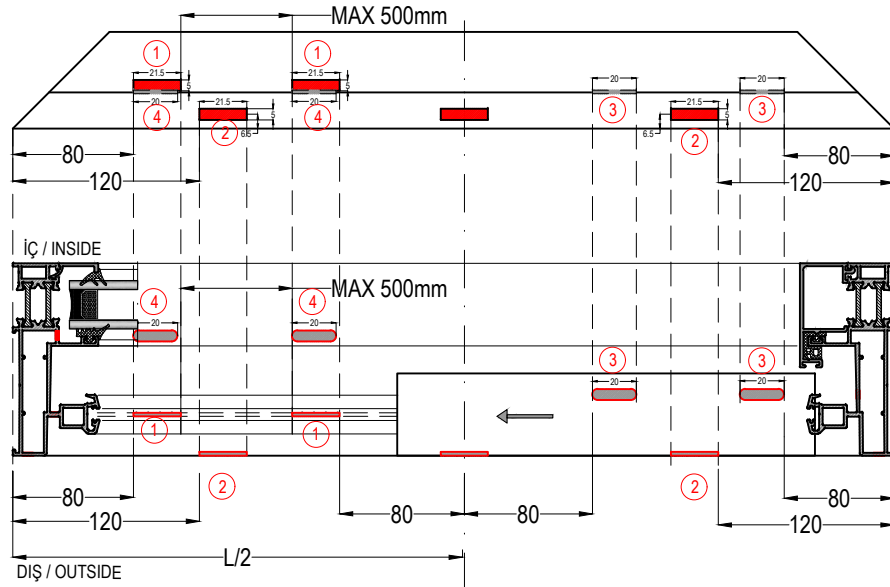


2 HAREKETLİ KANAT KESİM ÖLÇÜLERİ

2 SLIDING SASHES CUTTING SIZE

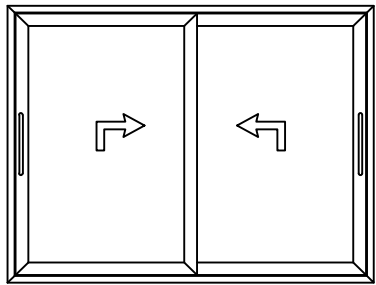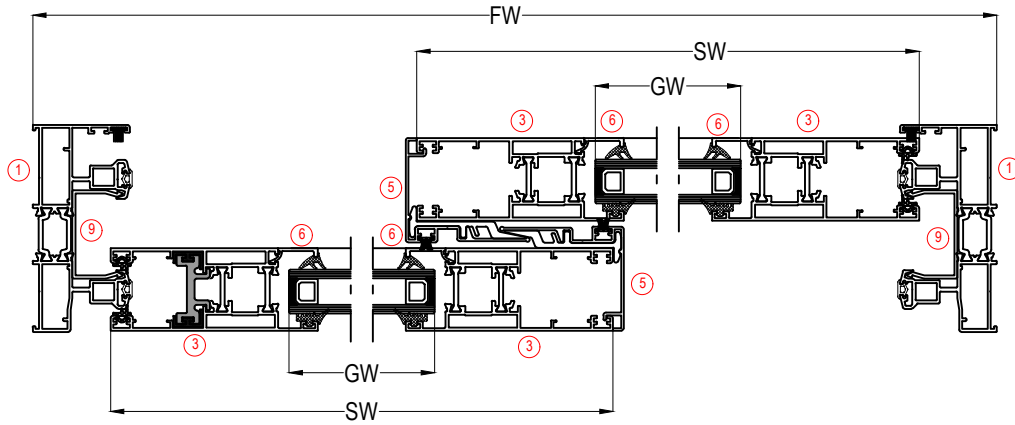

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES		
KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	CAM GENİŞLİK / Sash Glass Width	SW-162mm
GH	CAM YÜKSEKLİK / Sash Glass Height	SH-162mm

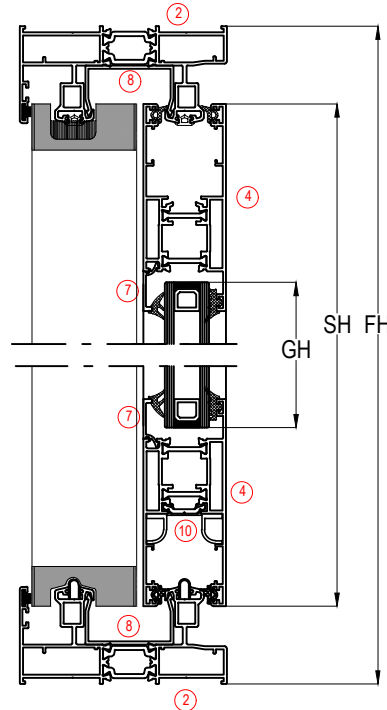

PROFİLLER / PROFILES					
NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 10		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 10		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	4	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FH-71mm
4	4	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/2+9,2mm
5	2	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
6	4	SL38T 20		DÜŞEY CAM ÇİTASI / Vertical Glazing Bead	G1=SH-188
7	4	SL38T 20		YATAY CAM ÇİTASI / Horizontal Glazing Bead	G2=SW-152
	2	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH - 37mm
8	2	SL38T-PLU		YATAY KASA KANAL PVC / Horizontal PVC Channel Profile	FW
9	2	SL38T-PLU		DÜŞEY KASA KANAL PVC / Vertical PVC Channel Profile	FH
	2	ASI-INR 01		ÇELİK RAY PROFİLİ / Steel Rail Profile	FW-77

FİTİLLER / GASKETS				
MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	(4xG1)+(4xG2)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Channel Gasket	(4xFH)+(2xFW)+(2xSH)
mt	EP1-01		DIŞ CAM FİTİLİ / Outer Glazing Gasket	(4xG1)+(4xG2)
mt	KF 67-550		FİRÇA FİTİL / Brush Gasket - 5,5mm	(2xFW)+(2xFH)+(2xSH)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(4xSH)+(4xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(4xSW)



AKSESUARLAR / ACCESSORIES				
2 Adet / Pcs	SL38T-KP04		KENET KAPAĞI ÜST / Interlock Profile Cap Top	SAĞ veya SOL / Right or Left
2 Adet / Pcs	SL38T-KP05		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	SAĞ veya SOL / Right or Left
2 Adet / Pcs	ASI-STP 06		KANAT STOPER / Sash Stopper	
8 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUAR / Sash Stabilization	2x(4 adet SW < 1000mm) 2x(6 adet SW > 1000mm)
1 Adet / Pcs	SL38T-SFP 01		ALT-ÜST HAVA KESİCİ EPDM / Bottom-Top Weather Protector	
1 Adet / Pcs	SL38T-SFP 02		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
20 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
8 Adet / Pcs	ASI-CC 1220		OZEL KOŞE BAĞLANTI / Corner Joint	
8 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
2 Adet / Pcs	SL38T-MEK1		200 kg KAPASİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
8 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift & Slide Locking Support	
4 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
	SL38T-PLZ03		NOT: SL38T-LS2 YERİNE KANAT ENİ KADAR SL38T-PLZ 03 KULLANILABİLİR. 2 ADET / Pcs	

4 LÜ KANAT KESİM ÖLÇÜLERİ

4 SLIDING SASH CUTTING SIZES

SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

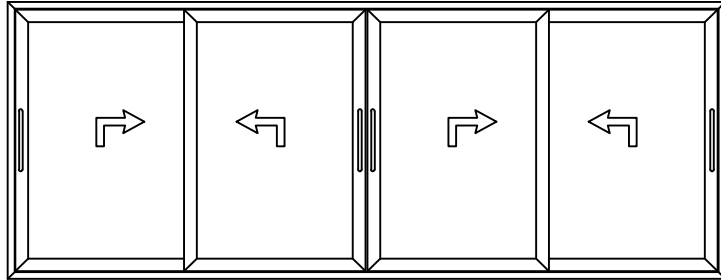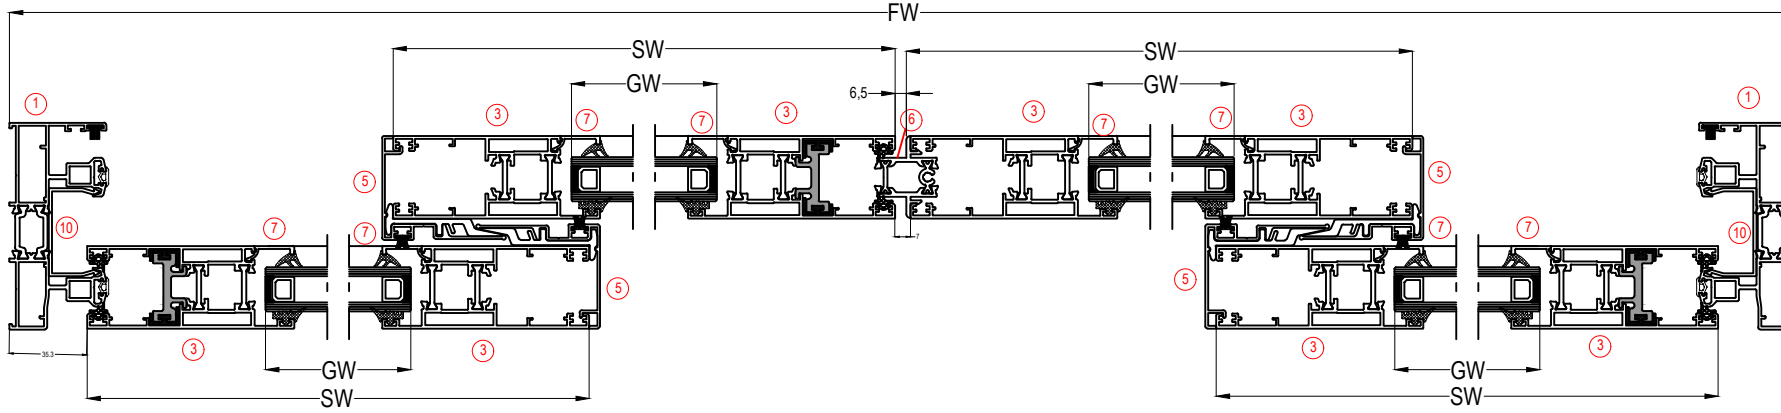

PROFİLLER / PROFILES


NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 10		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 10		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	8	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FH-71mm
4	8	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/4+25mm
5	4	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
6	1	SL38T43		ADAPTOR PROFİLİ / Adapter Profile	SH-55mm
7	8	SL38T 20		DÜŞEY CAM ÇİTASI / Vertical Glazing Bead	G1=SH-188
8	8	SL38T 20		YATAY CAM ÇİTASI / Horizontal Glazing Bead	G2=SW-152
4	2	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH - 37mm
9	2	SL38T-PLU		YATAY KASA KANAL PVC / Horizontal PVC Channel Profile	FW
10	2	SL38T-PLU		DÜŞEY KASA KANAL PVC / Vertical PVC Channel Profile	FH
	2	ASI-INR 01		ÇELİK RAY PROFİLİ / Steel Rail Profile	FW-77

FİTİLLER / GASKETS

MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	(8xG1)+(8xG2)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Channel Gasket	(4xFH)+(2xFW)+(4xSH)
mt	EP1-01		DİŞ CAM FİTİLİ / Outer Glazing Gasket	(8xG1)+(8xG2)
mt	KF 67-550		FİRÇA FİTİL / Brush Gasket - 5,5mm	(2xFW)+(2xFH)+(4xSH)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(6xSH)+(8xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(8xSW)

AKSESUARLAR / ACCESSORIES

2 Adet / Pcs	SL38T-KP04 SAĞ		KENET KAPAĞI ÜST / Interlock Profile Cap Top	
2 Adet / Pcs	SL38T-KP05 SAĞ		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	
2 Adet / Pcs	SL38T-KP04 SOL		KENET KAPAĞI ÜST / Interlock Profile Cap Top	
2 Adet / Pcs	SL38T-KP05 SOL		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	
2 Adet / Pcs	ASI-STP 06		KANAT STOPER / Sash Stopper	
16 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	4x(4 adet SW < 1000mm) 4x(6 adet SW > 1000mm)
3 Adet / Pcs	SL38T-SFP 01		ALT-ÜST HAVA KESİCİ EPDM / Bottom-Top Weather Protector	
3 Adet / Pcs	SL38T-SFP 02		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
2 Adet / Pcs	SL38T-KP 03		4'LÜ KANAT ADAPTÖR KAPAĞI / Adapter Cover	
36 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
16 Adet / Pcs	ASI-CC 1220		ÖZEL KOŞE BAĞLANTI / Corner Joint	
8 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
2 Adet / Pcs	SL38T-MEK1		KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
1 Takım / Set	SL38T-MEK1D		4'LÜ KANAT ORTA KİLİTLEME KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism For Central Locking	KOL / Handle
16 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift & Slide Locking Support	
8 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
	SL38T-PLZ03		NOT: SL38T-LS2 YERİNE KANAT ENİ KADAR SL38T-PLZ 03 KULLANILABİLİR. 4 ADET / Pcs	


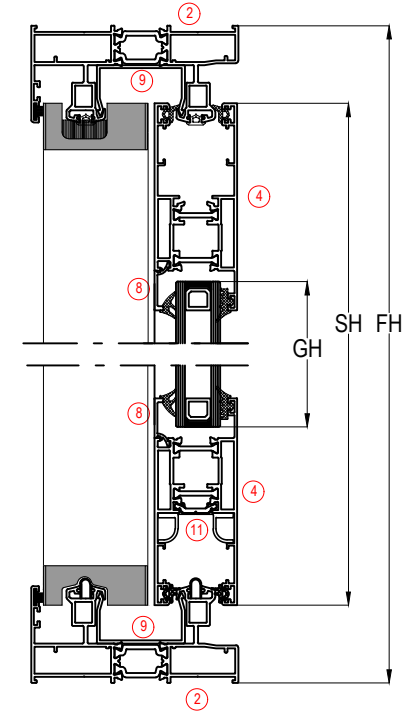


CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES

KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	HAREKETLİ KANAT CAM GENİŞLİK / Sash Glass Width	GW=SW-162mm
GH	HAREKETLİ KANAT CAM YÜKSEKLİK / Sash Glass Height	GH=SH-162mm


3 LÜ KANAT KESİM ÖLÇÜLERİ

3 SLIDING SASH CUTTING SIZES

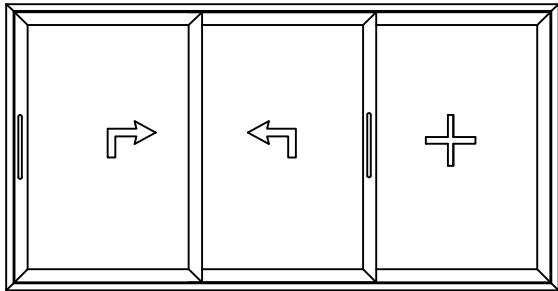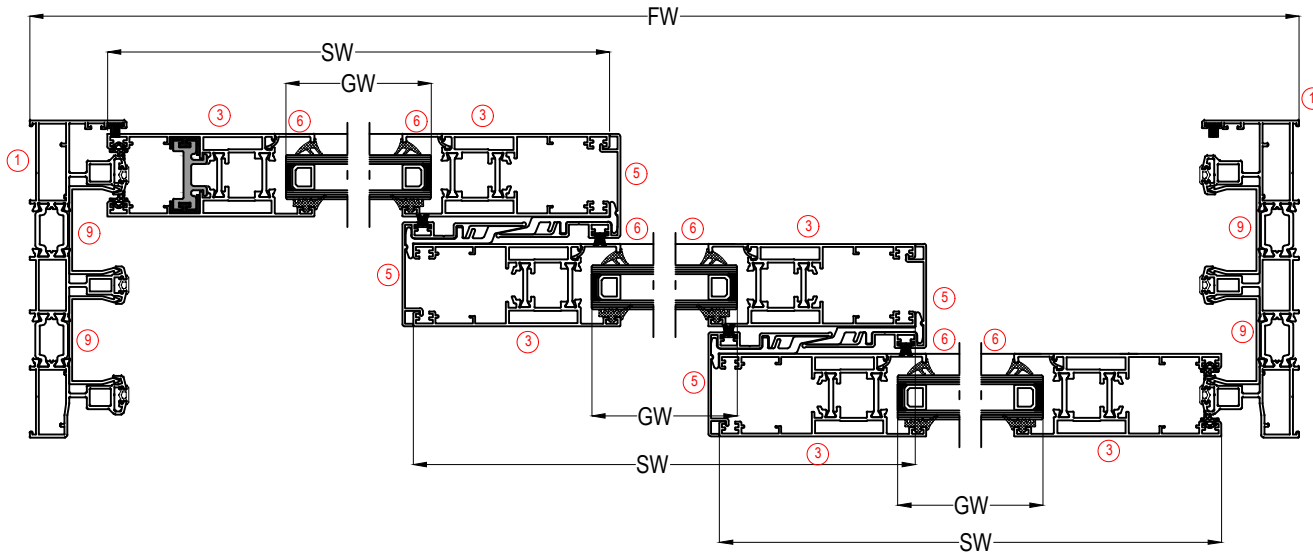

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES

KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	CAM GENİŞLİK / Sash Glass Width	SW-162mm
GH	CAM YÜKSEKLİK / Sash Glass Height	SH-162mm

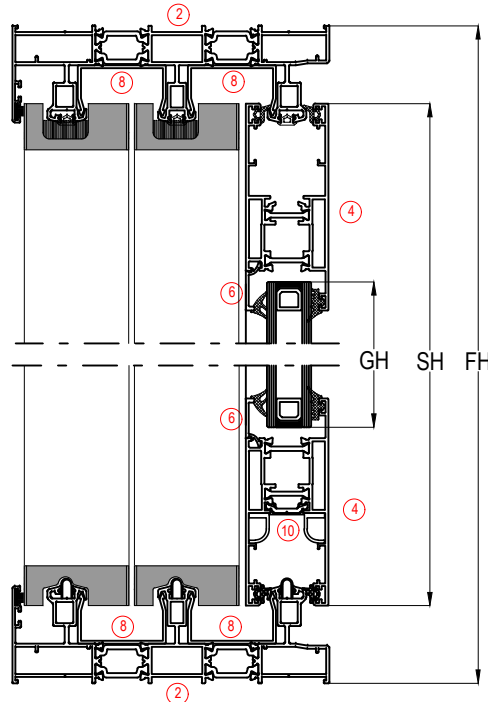

PROFİLLER / PROFILES

NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 101		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 101		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	6	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FH-71mm
4	6	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/3+35,8mm
5	4	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
6	6	SL38T 20		DÜŞEY CAM ÇİTASI / Vertical Glazing Bead	G1=SH-188
7	6	SL38T 20		YATAY CAM ÇİTASI / Horizontal Glazing Bead	G2=SW-152
	4	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH - 37mm
8	4	SL38T-PLU		YATAY KASA KANAL PVC / Horizontal PVC Channel Profile	FW
9	4	SL38T-PLU		DÜŞEY KASA KANAL PVC / Vertical PVC Channel Profile	FH
	3	ASI-INR 01		ÇELİK RAY PROFİLİ / Steel Rail Profile	FW-77

FİTİLLER / GASKETS

MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	(6xG1)+(6xG2)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Channel Gasket	(6xGH)+(3xFW)+(4xSH)
mt	EP1-01		DİŞ CAM FİTİLİ / Outer Glazing Gasket	(6xG1)+(6xG2)
mt	KF 67-550		FİRÇA FİTİL / Brush Gasket - 5,5mm	(2xFW)+(2xGH)+(4xSH)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(4xSH)+(6xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(6xSW)

AKSESUARLAR / ACCESSORIES




4 Adet / Pcs	SL38T-KP04		KENET KAPAĞI ÜST / Interlock Profile Cap Top	SAĞ veya SOL / Right or Left
4 Adet / Pcs	SL38T-KP05		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	SAĞ veya SOL / Right or Left
1 Adet / Pcs	ASI-STP 06		KANAT STOPER / Sash Stopper	
12 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	3 x (4 adet SW < 1000mm) 3 x (6 adet SW > 1000mm)
2 Adet / Pcs	SL38T-SFP 01		ALT-ÜST HAVA KESİCİ EPDM / Bottom-Top Weather Protector	
2 Adet / Pcs	SL38T-SFP 02		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
28 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
12 Adet / Pcs	ASI-CC 1220		OZEL KOSE BAĞLANTI / Corner Joint	
8 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
2 Adet / Pcs	SL38T-MEK1		200 kg KAPASİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
8 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift & Slide Locking Support	
6 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
	SL38T-PLZ03		NOT: SL38T-LS2 YERİNE KANAT ENİ KADAR SL38T-PLZ 03 KULLANILABİLİR - 3 ADET/Pcs	

SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

3 LÜ KANAT KESİM ÖLÇÜLERİ

3 SLIDING SASH CUTTING SIZES

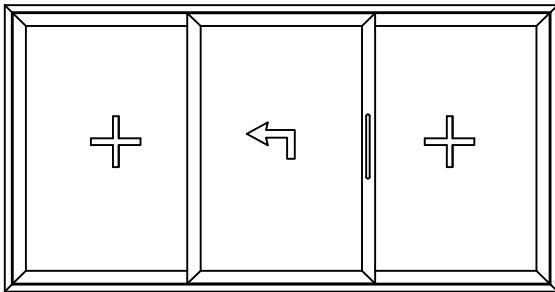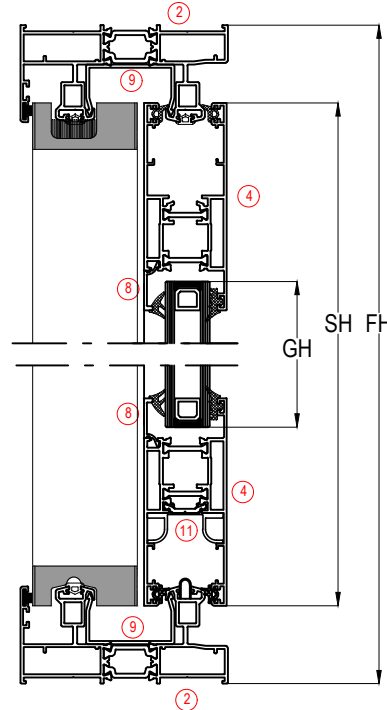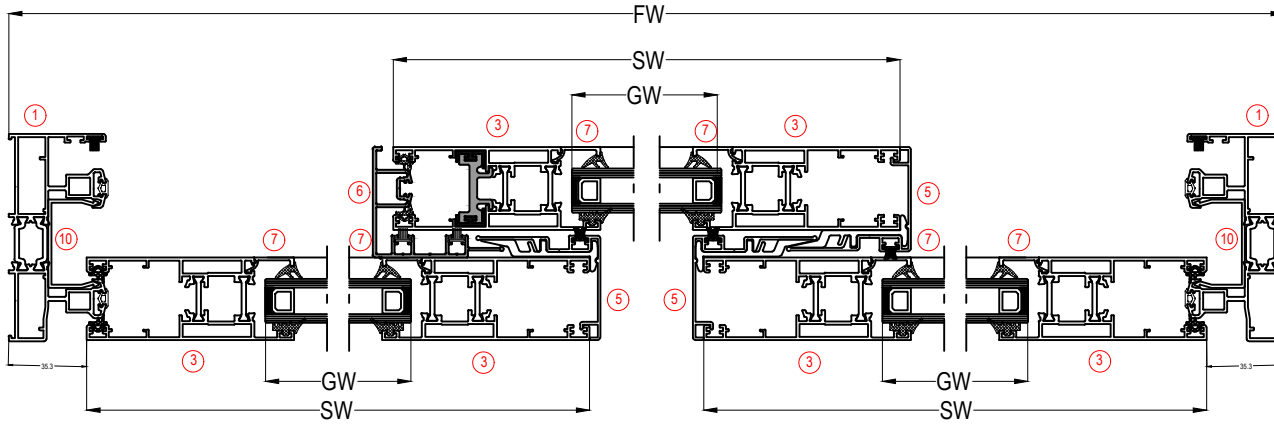

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES

KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	CAM GENİŞLİK / Sash Glass Width	SW-162mm
GH	CAM YÜKSEKLİK / Sash Glass Height	SH-162mm

PROFİLLER / PROFILES

NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 10		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 10		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	6	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FH-71mm
4	6	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/3+35,8mm
5	3	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
6	1	SL38T 45		3 LÜ KANAT ADAPTÖR / Adepter Profile	SH - 18 mm
7	6	SL38T 20		DÜŞEY CAM ÇITASI / Vertical Glazing Bead	G1=SH-188
8	6	SL38T 20		YATAY CAM ÇITASI / Horizontal Glazing Bead	G2=SW-152
	3	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH - 37mm
9	2	SL38T-PLU		YATAY KASA KANAL PVC / Horizontal PVC Channel Profile	FW
10	2	SL38T-PLU		DÜŞEY KASA KANAL PVC / Vertical PVC Channel Profile	FH
	1	ASI-INR 01		ÇELİK RAY PROFİLİ / Steel Rail Profile	FW-77

FİTİLLER / GASKETS

MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	(6xG1)+(6xG2)
mt	EP38-02		KANAL FİTİLİ / Frame Channel Gasket	(4xFH)+(3xFW)+(2xSH)
mt	EP1-01		DIŞ CAM FİTİLİ / Outer Glazing Gasket	(6xG1)+(6xG2)
mt	KF 67-550		FİRÇA FİTİL / Brush Gasket - 5,5mm	(2xFW)+(2xFH)+(3xSH)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(4xSH)+(6xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(6xSW)

AKSESUARLAR / ACCESSORIES



3 Adet / Pcs	SL38T-KP04		KENET KAPAĞI ÜST / Interlock Profile Cap Top	SAĞ veya SOL / Right or Left
3 Adet / Pcs	SL38T-KP05		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	SAĞ veya SOL / Right or Left
12 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	2x(4 adet SW < 1000mm) 2x(6 adet SW > 1000mm)
2 Adet / Pcs	SL38T-SFP 01		ALT-ÜST HAVA KESİCİ EPDM / Bottom-Top Weather Protector	
2 Adet / Pcs	SL38T-SFP 02		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
28 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
12 Adet / Pcs	ASI-CC 1220		OZEL KOSE BAĞLANTI / Corner Joint	
8 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
1 Adet / Pcs	SL38T-MEK1		200 kg KAPASİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
4 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift & Slide Locking Support	
4 Adet / Pcs	SL38T-DB100		KANAT SABİTLEME PARÇASI / Sash Fixed Parts	
2 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
	SL38T-PLZ03		NOT: SL38T-LS2 YERİNE KANAT ENİ KADAR SL38T-PLZ 03 KULLANILABİLİR. 1 ADET / Pcs	

SABİTLİ KASADA 1 HAREKETLİ KANAT KESİM ÖLÇÜLERİ CAM YATAY ÖLÇÜLERİ EŞİT OLMASINA GÖRE


1 SLIDING SASH IN FIXED FRAME CUTTING SIZE - ACCORDING TO THE EQUAL GLASS DIMENSIONS BOTH SASH AND FIXED PART

SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

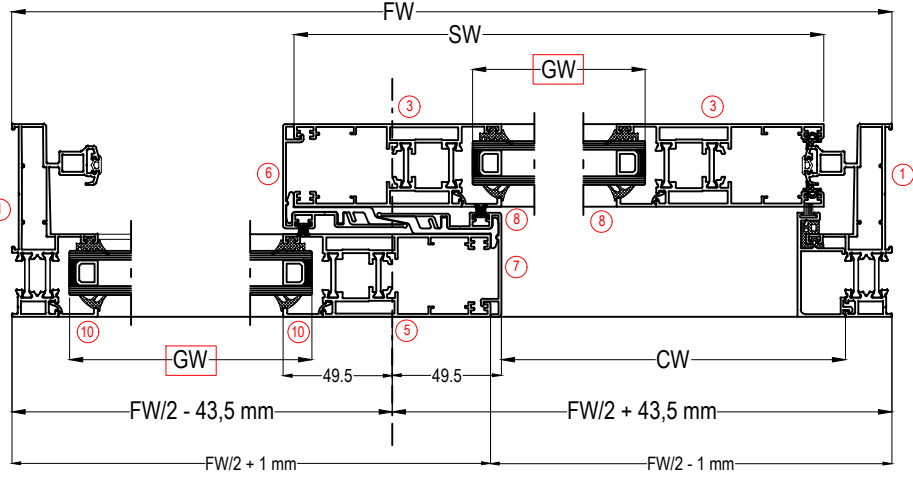

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES		
KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	HAREKETLİ KANAT CAM GENİŞLİK / Sash Glass Width	FW/2 - 105mm
GH	HAREKETLİ KANAT CAM YÜKSEKLİK / Sash Glass Height	SH - 162mm
GW	SABİT KISIM CAM GENİŞLİK / Fixed Glass Width	FW/2 - 105mm
FGH	SABİT KISIM CAM YÜKSEKLİK / Fixed Glass Height	FH - 52mm

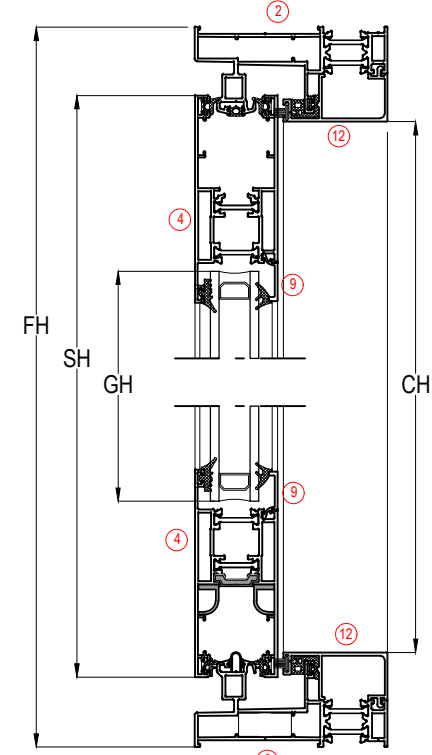


PROFİLLER / PROFILES					
NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 09		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 09		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	2	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FH-63 mm
4	2	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/2+57mm
5	1	SL38T 16		ORTA KAYIT KANAT PROFİLİ / Transom-Mullion Sash Profile	FH - 42mm
6	1	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
7	1	SL38T 42		ORTA KAYIT KENET PROFİLİ / Transom-Mullion Central Locking Profile	FH - 42mm
8	2	SL38T 20		KANAT DÜŞEY CAM ÇİTASI / Sash Vertical Glazing Bead	G1=SH-188
9	2	SL38T 20		KANAT YATAY CAM ÇİTASI / Sash Horizontal Glazing Bead	G2=SW-152
10	2	SL38T 20		SABİT DÜŞEY CAM ÇİTASI / Fixed Vertical Glazing Bead	G4=FW - 78mm
11	2	SL38T 20		SABİT YATAY CAM ÇİTASI / Fixed Horizontal Glazing Bead	G3=FW/2-96mm
12	2	SL38T 46		SABİT KASA ALT-ÜST KAPAK PROFİLİ / Top-Bottom Cover Profile	CW=FW/2 - 27mm
13	1	SL38T 46		SABİT KASA DÜŞEY KAPAK PROFİLİ / Vertical Cover Profile	CH=FW - 86mm
	2	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH-37mm
	1	ASI-INR 01		SL38-STP01	FW-70

FİTİLLER / GASKETS

MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	2 x (G1+G2+G3+G4)
mt	EP1-01		DIŞ CAM FİTİLİ / Outer Glazing Gasket	2 x (G1+G2+G3+G4)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Channel Gasket	(2xSH) + FW + (2xSH)
mt	KF 67-550		FİRÇA FİTİL / Brush Gasket - 5,5mm	(2xSH) + CH + (2xCW)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(2xSH) + (2xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(2xSW)
mt	EP38-03		SABİT ÇİTA FİTİLİ / Fixed Frame Gasket	(2xCW) +CH

AKSESUARLAR / ACCESSORIES

1 Adet / Pcs	SL38T-KP 04		KENET KAPAĞI ÜST / Interlock Profile Cap Top	SAĞ veya SOL / Right or Left
1 Adet / Pcs	SL38T-KP 05		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	SAĞ veya SOL / Right or Left
1 Adet / Pcs	ASI-STP 06		KANAT STOPER / Sash Stopper	
4 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	4 adet SW < 1000mm 6 adet SW > 1000mm
1 Adet / Pcs	SL38T-SFP 04		ALT HAVA KESİCİ EPDM / Bottom Top Weather Protector	
1 Adet / Pcs	SL38T-SFP 03		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
8 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
4 Adet / Pcs	ASI-CC 1220		OZEL KOŞE BAĞLANTI / Corner Joint	
4 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
4 Adet / Pcs	ASI-KT 1105		KÖŞE TAKOZU / Corner Joint	
1 Adet / Pcs	SL38T-MEK1		200 kg KAPASİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
4 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift&Slide Locking Support	
2 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
4 Adet / Pcs	ASI-P 100.1		ORTA KAYIT DIK BAĞLANTI / T Joint	


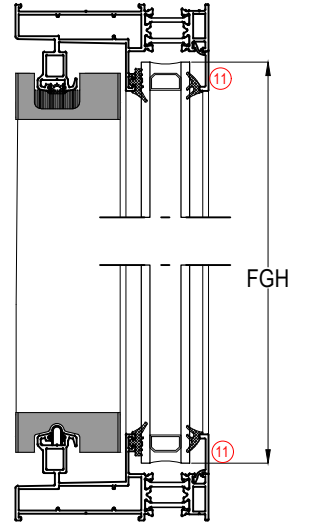


SABİTLİ KASADA 1 HAREKETLİ KANAT KESİM ÖLÇÜLERİ ORTA KENET KİLİTLEME TAM ORTADA OLMASINA GÖRE

1 SLIDING SASH IN FIXED FRAME CUTTING SIZE - ACCORDING TO THE EQUAL CENTRAL LOCKING POINT

SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
THERMAL LIFT&SLIDE SYSTEM

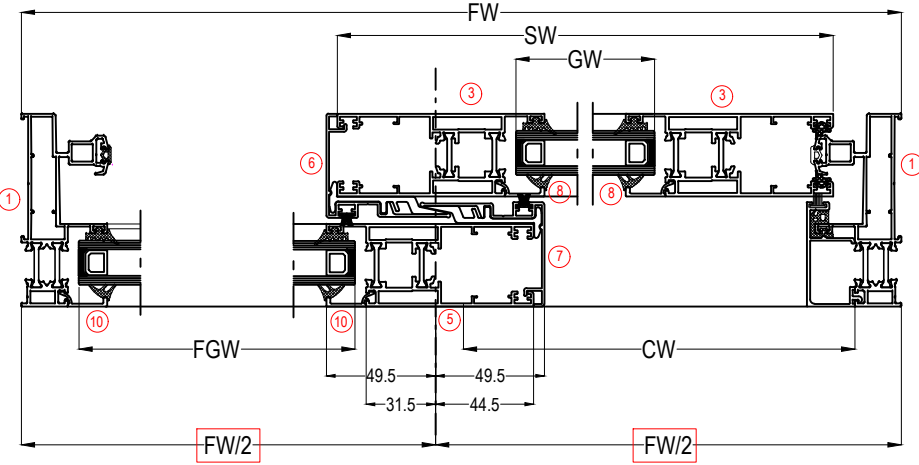

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES

KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	HAREKETLİ KANAT CAM GENİŞLİK / Sash Glass Width	SW - 162mm
GH	HAREKETLİ KANAT CAM YÜKSEKLİK / Sash Glass Height	SH - 162mm
FGW	SABİT KISIM CAM GENİŞLİK / Fixed Glass Width	FW/2 - 62mm
FGH	SABİT KISIM CAM YÜKSEKLİK / Fixed Glass Height	FH - 52mm



FİTİLLER / GASKETS

MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	2 x (G1+G2+G3+G4)
mt	EP1-01		DIŞ CAM FİTİLİ / Outer Glazing Gasket	2 x (G1+G2+G3+G4)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Channel Gasket	(2x FH) + FW + (2x SH)
mt	KF 67-550		FIRÇA FİTİLİ / Brush Gasket - 5,5mm	(2x SH) + CH + (2x CW)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(2x SH) + (2x SW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(2x SW)
mt	EP38-03		SABİT ÇİTA FİTİLİ / Fixed Frame Gasket	(2x CW) + CH

AKSESUARLAR / ACCESSORIES

1 Adet / Pcs	SL38T-KP 04		KENET KAPAĞI ÜST / Interlock Profile Cap Top	SAĞ veya SOL / Right or Left
1 Adet / Pcs	SL38T-KP 05		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	SAĞ veya SOL / Right or Left
2 Adet / Pcs	ASI-STP 06		KANAT STOPER / Sash Stopper	
4 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	4 adet SW < 1000mm 6 adet SW > 1000mm
1 Adet / Pcs	SL38T-SFP 04		ALT HAVA KESİCİ EPDM / Bottom Top Weather Protector	
1 Adet / Pcs	SL38T-SFP 03		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
8 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
4 Adet / Pcs	ASI-CC 1220		OZEL KOŞE BAĞLANTI / Corner Joint	
4 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
4 Adet / Pcs	ASI-KT 1105		KÖŞE TAKOZU / Corner Joint	
1 Adet / Pcs	SL38T-MEK1		200 kg KAPAŞİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
4 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift & Slide Locking Support	
2 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
4 Adet / Pcs	ASI-P 100.1		ORTA KAYIT DİK BAĞLANTI / T Joint	





PROFİLLER / PROFILES					
NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 09		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 09		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	2	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FH-63 mm
4	2	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/2+14 mm
5	1	SL38T 16		ORTA KAYIT KANAT PROFİLİ / Transom-Mullion Sash Profile	FH - 42mm
6	1	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
7	1	SL38T 42		ORTA KAYIT KENET PROFİLİ / Transom-Mullion Central Locking Profile	FH - 42mm
8	2	SL38T 20		KANAT DÜŞEY CAM ÇİTASI / Sash Vertical Glazing Bead	G1=SH-188
9	2	SL38T 20		KANAT YATAY CAM ÇİTASI / Sash Horizontal Glazing Bead	G2=SW-152
10	2	SL38T 20		SABİT DÜŞEY CAM ÇİTASI / Fixed Vertical Glazing Bead	G4=FH - 78mm
11	2	SL38T 20		SABİT YATAY CAM ÇİTASI / Fixed Horizontal Glazing Bead	G3=FW/2-53 mm
12	2	SL38T 46		SABİT KASA ALT-ÜST KAPAK PROFİLİ / Top-Bottom Cover Profile	CW=FW/2 - 71 mm
13	1	SL38T 46		SABİT KASA DÜŞEY KAPAK PROFİLİ / Vertical Cover Profile	CH=FH - 86mm
	2	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH-37mm
	1	ASI-INR 01		SL38-STP01	FW-70

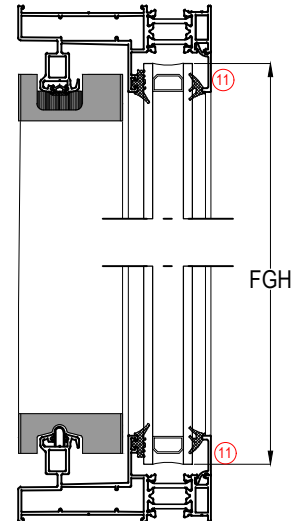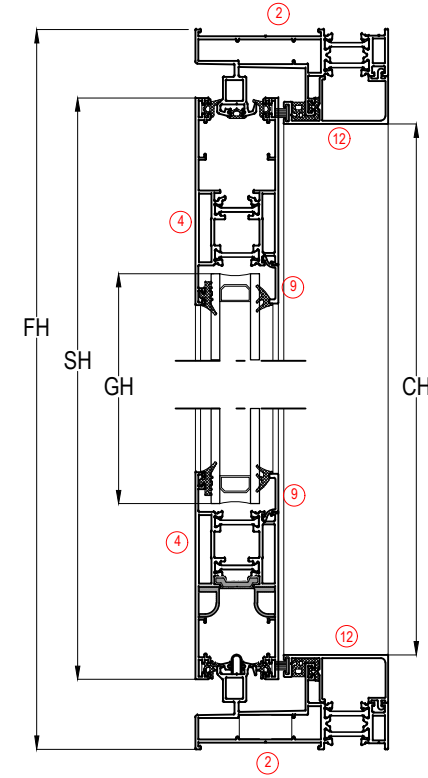

SABİTLİ KASADA 1 HAREKETLİ 2 Lİ KANAT KESİM ÖLÇÜLERİ CAM YATAY ÖLÇÜLERİ EŞİT OLMASINA GÖRE
1 SLIDING SASH IN FIXED FRAME CUTTING SIZE - ACCORDING TO THE EQUAL GLASS DIMENSIONS BOTH SASH AND FIXED PART

SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
 THERMAL LIFT&SLIDE SYSTEM

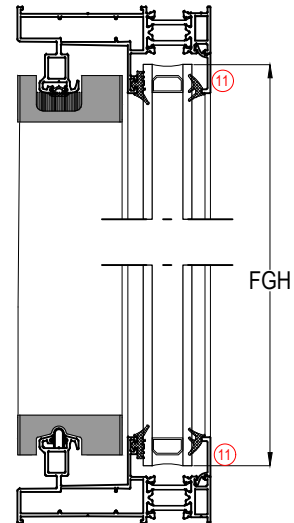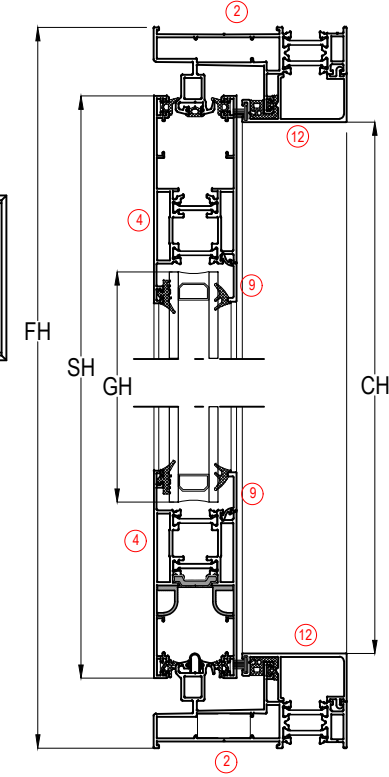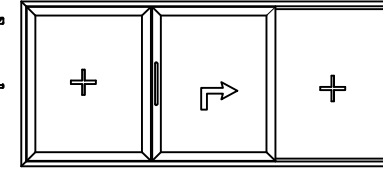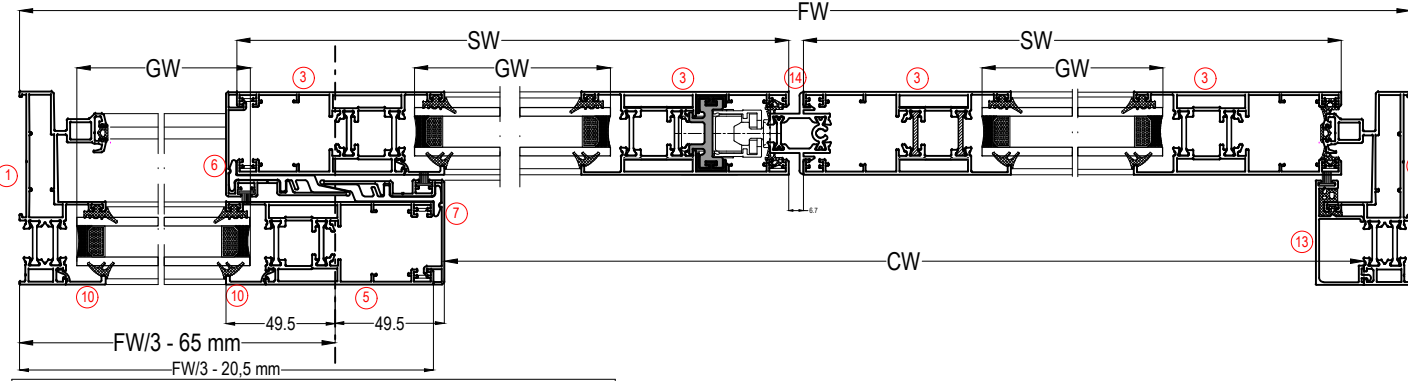

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES		
KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	HAREKETLİ KANAT CAM GENİŞLİK / Sash Glass Width	FW/3 - 126mm
GH	HAREKETLİ KANAT CAM YÜKSEKLİK / Sash Glass Height	SH - 162mm
GW	SABİT KISIM CAM GENİŞLİK / Fixed Glass Width	FW/3 - 126mm
FGH	SABİT KISIM CAM YÜKSEKLİK / Fixed Glass Height	FH - 52mm

PROFİLLER / PROFILES					
NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 09		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 09		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	4	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FW-63 mm
4	4	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/3+35mm
5	1	SL38T 16		ORTA KAYIT KANAT PROFİLİ / Transom-Mullion Sash Profile	FH - 42mm
6	1	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
7	1	SL38T 42		ORTA KAYIT KENET PROFİLİ / Transom-Mullion Central Locking Profile	FH - 42mm
8	4	SL38T 20		KANAT DÜŞEY CAM ÇİTASI (SL38T 16 KANAT İÇİN) / Sash Vertical Glazing Bead	G1=SH-188
9	4	SL38T 20		KANAT YATAY CAM ÇİTASI (SL38T 16 KANAT İÇİN) / Sash Horizontal Glazing Bead	G2=SW-152
10	2	SL38T 20		SABİT DÜŞEY CAM ÇİTASI / Fixed Vertical Glazing Bead	G4=FW - 78mm
11	2	SL38T 20		SABİT YATAY CAM ÇİTASI / Fixed Horizontal Glazing Bead	G3=FW/3-117mm
12	2	SL38T 46		SABİT KASA ALT-ÜST KAPAK PROFİLİ / Top-Bottom Cover Profile	CW=(FW/3)x2 - 6mm
13	1	SL38T 46		SABİT KASA DÜŞEY KAPAK PROFİLİ / Vertical Cover Profile	CH=FW - 86mm
14	1	SL38T43		ADAPTOR PROFİLİ / Adapter Profile	SH-55mm
	2	SL38T-PLZ 04		KENET PVC PROFİLİ / Central Locking PVC Profile	SH-37mm
	1	ASI-INR 01		ÇELİK RAY PROFİLİ / Steel Rail Profile	FW-70




FİTİLLER / GASKETS				
MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	4x(G1+G2)+2x(G3+G4)
mt	EP1-01		DIŞ CAM FİTİLİ / Outer Glazing Gasket	4x(G1+G2)+2x(G3+G4)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Channel Gasket	(2xSH) + FW + (2xGH)
mt	KF 67-550		FIRÇA FİTİLİ / Brush Gasket - 5,5 mm	(2xSH) + CH + (2xCW)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(4xSH) + (4xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(4xSW)
mt	EP38-03		SABİT ÇİTA FİTİLİ / Fixed Frame Gasket	2xCW+CH

AKSESUARLAR / ACCESSORIES				
1 Adet / Pcs	SL38T-KP 04		KENET KAPAĞI ÜST / Interlock Profile Cap Top	SAĞ veya SOL / Right or Left
1 Adet / Pcs	SL38T-KP 05		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	SAĞ veya SOL / Right or Left
8 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	4 adet SW < 1000mm 6 adet SW > 1000mm
2 Adet / Pcs	SL38T-SFP 04		ALT HAVA KESİCİ EPDM / Bottom Top Weather Protector	
2 Adet / Pcs	SL38T-SFP 03		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
16 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
8 Adet / Pcs	ASI-CC 1220		OZEL KOŞE BAĞLANTI / Corner Joint	
4 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
4 Adet / Pcs	ASI-KT 1105		KÖŞE TAKOZU / Corner Joint	
1 Adet / Pcs	SL38T-MEK1		200 kg KAPASİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
4 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift & Slide Locking Support	
2 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift & Slide Roller Support	
4 Adet / Pcs	ASI-P 100.1		ORTA KAYIT DIK BAĞLANTI / T Joint	
2 Adet / Pcs	SL38T-KP 03		4LÜ KANAT ADAPTÖR KAPAĞI / Adapter Cover	
2 Adet / Pcs	SL38T-DB100		KANAT SABİTLEME PARÇASI / Sash Fixed Parts	
4	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	

SABİTLİ KASADA 1 HAREKETLİ 2 Lİ KANAT KESİM ÖLÇÜLERİ CAM YATAY ÖLÇÜLERİ EŞİT OLMASINA GÖRE
1 SLIDING SASH IN FIXED FRAME CUTTING SIZE - ACCORDING TO THE EQUAL GLASS DIMENSIONS BOTH SASH AND FIXED PART

SL38T-K

YALITIMLI KALDIR-SÜR SİSTEM
 THERMAL LIFT&SLIDE SYSTEM

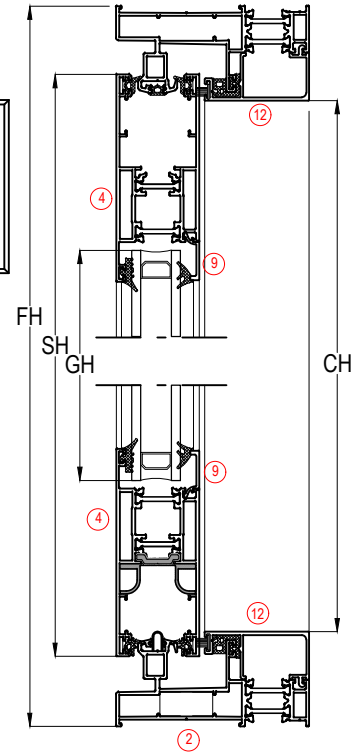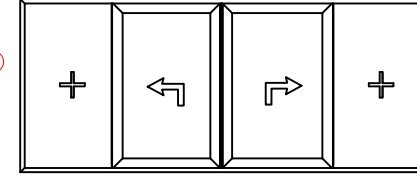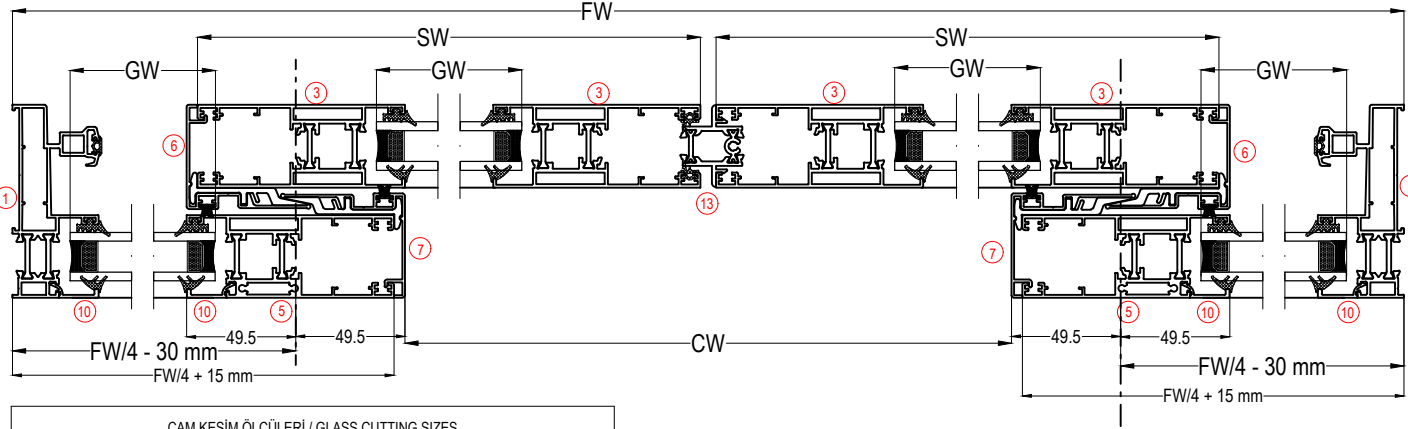

CAM KESİM ÖLÇÜLERİ / GLASS CUTTING SIZES		
KOD / Code	TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
GW	HAREKETLİ KANAT CAM GENİŞLİK / Sash Glass Width	FW/4 - 91 mm
GH	HAREKETLİ KANAT CAM YÜKSEKLİK / Sash Glass Height	SH - 162mm
GW	SABİT KISIM CAM GENİŞLİK / Fixed Glass Width	FW/4 - 91 mm
FGH	SABİT KISIM CAM YÜKSEKLİK / Fixed Glass Height	FH - 52mm

PROFİLLER / PROFILES					
NO / Number	ADET / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
1	2	SL38T 09		DÜŞEY KASA PROFİLİ / Vertical Frame Profile	FH
2	2	SL38T 09		YATAY KASA PROFİLİ / Horizontal Frame Profile	FW
3	4	SL38T16 SL38T17 SL38T12		DÜŞEY KANAT PROFİLİ / Vertical Sash Profile	SH=FW-63mm
4	4	SL38T16 SL38T17 SL38T12		YATAY KANAT PROFİLİ / Horizontal Sash Profile	SW=FW/4+70,5mm
5	2	SL38T 16		ORTA KAYIT KANAT PROFİLİ / Transom-Mullion Sash Profile	FH - 42mm
6	2	SL38T42		KENET PROFİLİ / Central Locking Profile	SH - 37mm
7	2	SL38T 42		ORTA KAYIT KENET PROFİLİ / Transom-Mullion Central Locking Profile	FH - 42mm
8	4	SL38T 20		KANAT DÜŞEY CAM ÇİTASI (SL38T 16 KANAT İÇİN) / Sash Vertical Glazing Bead	G1=SH-188
9	4	SL38T 20		ANAT YATAY CAM ÇİTASI (SL38T 16 KANAT İÇİN) / Sash Horizontal Glazing Bead	G2=SW-152
10	4	SL38T 20		SABİT DÜŞEY CAM ÇİTASI / Fixed Vertical Glazing Bead	G4=FW - 78mm
11	4	SL38T 20		SABİT YATAY CAM ÇİTASI / Fixed Horizontal Glazing Bead	G3=FW/4 - 82mm
12	2	SL38T 46		SABİT KASA ALT-ÜST KAPAK PROFİLİ / Top-Bottom Cover Profile	FW/2 - 40 mm
13	1	SL38T43		ADAPTOR PROFİLİ / Adapter Profile	SH-55mm
	2	SL38T-PLZ 04		KENET PVC PROFİL / Central Locking PVC Profile	SH-37mm
	1	ASI-INR 01		ÇELİK RAY PROFİLİ / Steel Rail Profile	FW-70

FİTİLLER / GASKETS				
MİKTAR / Unit	KOD / Code	PROFİL ÇİZİMİ / Drawing	PROFİL TANIMI / Description	KESİM ÖLÇÜSÜ / Cutting Dimensions
mt	EP2-02		İÇ CAM FİTİLİ / Inner Glazing Gasket	4x(G1+G2+G3+G4)
mt	EP1-01		DIŞ CAM FİTİLİ / Outer Glazing Gasket	4x(G1+G2+G3+G4)
mt	KF 67-550		FİRÇA FİTİL / Brush Gasket - 5,5 mm	(4xSH) + (2xCW)
mt	EP38-01		KANAT FİTİLİ / Sash Gasket	(2xSH) + (4xSW)
mt	EP38-05		ÜST KANAT FİTİLİ / Sash Gasket	(4xSW)
mt	EP38-02		KASA KANAL FİTİLİ / Frame Gasket	(2XFH) + FW + (4xSH)
mt	EP38-03		SABİT ÇİTA FİTİLİ / Fixed Frame Gasket	2xCW

AKSESUARLAR / ACCESSORIES				
1 Adet / Pcs	SL38T-KP 04 SAĞ		KENET KAPAĞI ÜST / Interlock Profile Cap Top	
1 Adet / Pcs	SL38T-KP 04 SOL		KENET KAPAĞI ÜST / Interlock Profile Cap Top	
1 Adet / Pcs	SL38T-KP 05 SAĞ		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	
1 Adet / Pcs	SL38T-KP 05 SOL		KENET KAPAĞI ALT / Interlock Profile Cap Bottom	
8 Adet / Pcs	SL38T-STP01		KANAT DENGELEME AKSESUARİ / Sash Stabilization	4 adet SW < 1000mm 6 adet SW > 1000mm
3 Adet / Pcs	SL38T-SFP 04		ALT HAVA KESİCİ EPDM / Bottom Top Weather Protector	
3 Adet / Pcs	SL38T-SFP 03		ÜST HAVA KESİCİ EPDM / Top Weather Protector	
16 Adet / Pcs	ASI-PB 19		KÖŞE GÖNYESİ / Corner Alignment	
8 Adet / Pcs	ASI-CC 1220		OZEL KOSE BAĞLANTI / Corner Joint	
4 Adet / Pcs	ASI-PB 1124 ASI-KT 1124		PİMLİ-PRESS BAĞLANTI / Corner Joint Pin	
4 Adet / Pcs	ASI-KT 1105		KÖŞE TAKOZU / Corner Joint	
1 Adet / Pcs	SL38T-MEK1D		200 kg KAPASİTELİ KALDIR SÜR MEKANİZMA / Lift & Slide Mechanism	KOL / Handle
8 Adet / Pcs	SL38T-LS1		KALDIR-SÜR SİSTEM İSPANYOLET DESTEĞİ / Lift&Slide Locking Support	
4 Adet / Pcs	SL38T-LS2		KALDIR-SÜR SİSTEM RULMAN DESTEĞİ / Lift&Slide Roller Support	
8 Adet / Pcs	ASI-P 100.1		ORTA KAYIT DIK BAĞLANTI / T Joint	
2 Adet / Pcs	SL38T-KP 03		4'LÜ KANAT ADAPTÖR KAPAĞI / Adapter Cover	

